



ATLANTIS G2 TOP

AtlantisG2Top IB RWE.EOP / RGB96/Nx G5 011W L1000

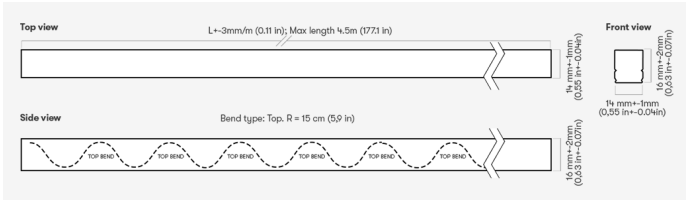

COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	Total: 287 Lm/m (87 Lm/ft) Red: 62 Lm/m (19 Lm/ft) Green: 183 Lm/m (56 Lm/ft) Blue: 41 Lm/m (12 Lm/ft)
EFFICACY	25 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL Dimmable

VOLTAGE 24 VDC
WATTAGE 11.52 W/m | 3.5 W/ft

CUTTING STEP 62.5 mm (2.46")
OTHER DETAILS IP67 protection
Bend radius: 15 cm (5.9")

TEMPERATURE Tc max <75°C (167°F)
OPERATING TEMP. -25°C...+50°C (-13°F...122°F)

DIMENSIONS Width: 14 mm ±1mm (0.55" ±0.04")
Height: 16 mm ±2mm (0.63" ±0.07")
Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.