



# ATLANTIS G2 TOP

AtlantisG2Top IB RWE.EOP / FL112/Nx G5 04W 830 L1000

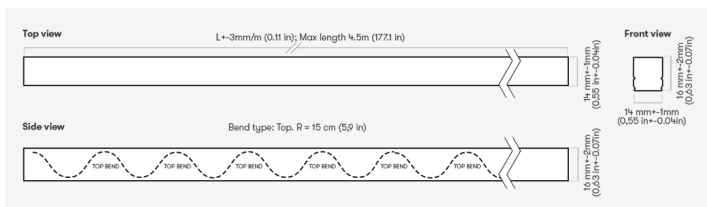

<b>CCT</b>	3000K
<b>CRI</b>	CRI 80+
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>LUMINOUS FLUX</b>	418 Lm/m (127 Lm/ft)
<b>EFFICACY</b>	87 Lm/W
<b>LIFETIME</b>	L90B10 60.000 h

<b>CONTROL</b>	Dimmable
----------------	----------

<b>VOLTAGE</b>	24 VDC
<b>WATTAGE</b>	4.8 W/m   1.46 W/ft

<b>CUTTING STEP</b>	62.5 mm (2.46")
<b>OTHER DETAILS</b>	IP67 protection Bend radius: 15 cm (5.9")

<b>TEMPERATURE</b>	Tc max <75°C ( 167°F )
<b>OPERATING TEMP.</b>	-25°C...+50°C ( -13°F...122°F )

<b>DIMENSIONS</b>	Width: 14 mm ±1mm (0.55" ±0.04") Height: 16 mm ±2mm (0.63" ±0.07") Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)
-------------------	---



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.