



VIPER

FL-56-2/G5 850

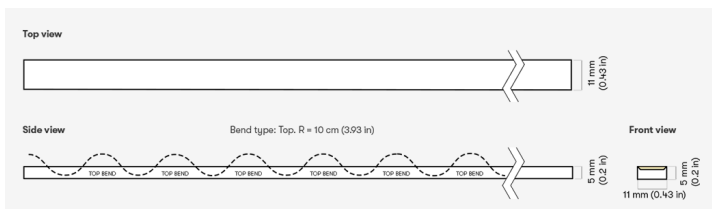

LIGHT TYPE	White
CCT	5000K
CCT Shift	4900K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	120° beam angle
LUMINOUS FLUX	328 Lm/m (100 Lm/ft)
EFFICACY	137 Lm/W
LIFETIME	L70B50 50.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	2.4 W/m 0.73 W/ft

CUTTING STEP	125 mm (4.92")
MAX RUN	18.5 m (61')
PACKING	5m or customized length per reel
DIMENSIONS	Width: 11 mm Height: 5 mm (0.2")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)
STORAGE TEMP.	-25°C...+80°C (-13°F...176°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.