

# xLINE IP67 TUNABLE WHITE


xLine A017M IEC PBK EOP / TW56/Nx G4 09W 820/835 L1000  
Luminaire segment




## COLORS

 Black housing

## PHOTOMETRICS




## SEGMENT LAYOUT




Luminaire type segment

## CONNECTION TYPE



End exit wire

## TECHNICAL DRAWING

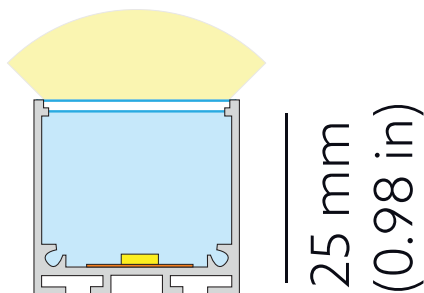

26 mm  
(1.02 in)

## SPECTRUM

Warm LED: CRI 80+ 2000K

Cold LED: CRI 80+ 3500K

3-Step MacAdam

## COVER

Opal

## LUMINOUS FLUX

Per segment: 248 lm

Light source (per segment): 1232 lm

Per meter/feet: 248 lm/m | 76 lm/ft

## EFFICACY

Luminaire: 26 lm/W

Light source: 128 lm/W

## LIFETIME

L90B10 60.000h

## HOUSING

Aluminum, polyurethane

## ELECTRICAL

Segment power: 9.6 W

Power per meter/feet: 9.6 W/m

Voltage: 24 VDC

## TEMPERATURE

T<sub>c</sub> max <75°C (167°F)

Operating: -25°C...+50°C (-13°F...122°F)

## OTHER DETAILS

IP67 protection

Dimmable

Install in well-ventilated areas only

## DIMENSIONS

Width: 26 mm (1.02")

Height: 25 mm (0.98")

Length: 1004 mm | 3.3'

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.