



xLINE IP67 TUNABLE WHITE


xLine A017M IEC AGY EOP / TW56/Nx G4 09W 820/840 L1000
Luminaire segment




COLORS

Grey housing

PHOTOMETRICS




SEGMENT LAYOUT




Luminaire type segment

CONNECTION TYPE



End exit wire

TECHNICAL DRAWING

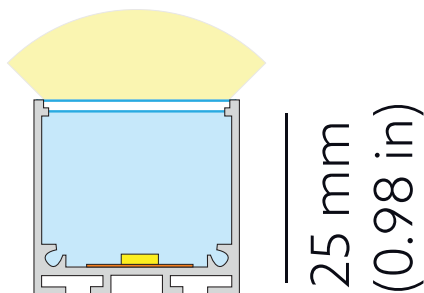

26 mm
(1.02 in)

SPECTRUM

Warm LED: CRI 80+ 2000K

Cold LED: CRI 80+ 4000K

3-Step MacAdam

COVER

Opal

LUMINOUS FLUX

Per segment: 248 lm

Light source (per segment): 1234 lm

Per meter/feet: 248 lm/m | 76 lm/ft

EFFICACY

Luminaire: 26 lm/W

Light source: 129 lm/W

LIFETIME

L90B10 60.000h

HOUSING

Aluminum, polyurethane

ELECTRICAL

Segment power: 9.6 W

Power per meter/feet: 9.6 W/m

Voltage: 24 VDC

TEMPERATURE

Tc max <75°C (167°F)

Operating: -25°C...+50°C (-13°F...122°F)

OTHER DETAILS

IP67 protection

Dimmable

Install in well-ventilated areas only

DIMENSIONS

Width: 26 mm (1.02")

Height: 25 mm (0.98")

Length: 1004 mm | 3.3'

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.