





VENTA IP67

A130x IP67 OPL PWE L1000 / FL112/Nx 01W 822

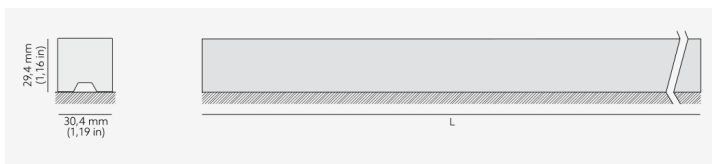

| | |
|--------------------------|---------------------|
| LIGHT TYPE | White |
| CCT | 2200K |
| CRI | CRI 80+ |
| COLOR CONSISTENCY | 3-Step MacAdam |
| PHOTOMETRIC | Opal° Beam angle |
| LUMINOUS FLUX | 125 Lm/m (38 Lm/ft) |
| EFFICACY | 65 Lm/W |
| LIFETIME | L90B10 60.000 h |

| | |
|----------------|----------|
| CONTROL | Dimmable |
|----------------|----------|

| | |
|----------------|----------------------|
| VOLTAGE | 24 VDC |
| WATTAGE | 1.92 W/m 0.59 W/ft |

| | |
|---------------------|---|
| CUTTING STEP | 62.5 mm (2.46") |
| MAX RUN | 33 m (108') |
| DIMENSIONS | Width: 30 mm (1.18") Height: 30 mm (1.18") |
| IP CLASS | IP67 |

| | |
|------------------------|---------------------------------|
| TEMPERATURE | Tc max <75°C (167°F) |
| OPERATING TEMP. | -25°C...+50°C (-13°F...122°F) |
| STORAGE TEMP. | -25°C...+80°C (-13°F...176°F) |



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.