





VENTA IP67

A130x IP67 OPL PWE L1000 / FL112/Nx 01W 835

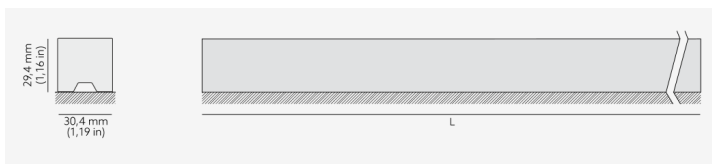

LIGHT TYPE	White
CCT	3500K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	Opal° Beam angle
LUMINOUS FLUX	168 Lm/m (51 Lm/ft)
EFFICACY	88 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	1.92 W/m 0.59 W/ft

CUTTING STEP	62.5 mm (2.46")
MAX RUN	33 m (108')
DIMENSIONS	Width: 30 mm (1.18") Height: 30 mm (1.18")
IP CLASS	IP67

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)
STORAGE TEMP.	-25°C...+80°C (-13°F...176°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.