

ULA L IP67 RGBW LIGHT

UlaL.IP67 A1112 IEC AGY EOP / RGBW48/Nx G4 014W 825 L1000


Luminaire segment




COLORS

 Grey housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

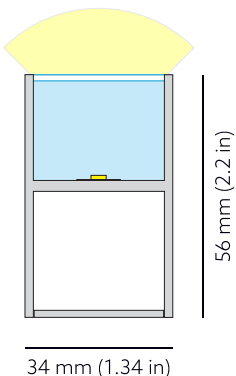

SPECTRUM (WHITE LED)	2500K CRI 80+ 3-Step MacAdam
-----------------------------	------------------------------------

COVER	Opal
--------------	------

LUMINOUS FLUX*	Per segment: 411 lm Light source (per segment): 828 lm Per meter/feet: 411 lm/m 125 lm/ft RGB only: 223 lm/m
-----------------------	---

EFFICACY	Luminaire: 29 lm/W Light source: 58 lm/W
-----------------	---

LIFETIME	L90B10 60.000h
-----------------	----------------

HOUSING	Aluminum, polyurethane
----------------	------------------------

ELECTRICAL	Segment power: 14.4 W Power per meter/feet: 14.4 W/m Voltage: 24 VDC
-------------------	--

TEMPERATURE	Tc max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)
--------------------	--

OTHER DETAILS	IP67 protection Dimmable Install in well-ventilated areas only
----------------------	--

DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 1003 mm 3.3'
-------------------	---

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.