

# ULA L IP67 RGBW LIGHT

ULA L IP67 LUM RGBW-48-14/L3-822 AG L125

Luminaire segment

Product code: UL67 LUM OP RGBW48-14L3-822 AG 0125


Article No.: C6ABKECABXXB0125




## COLORS



## PHOTOMETRICS




## SEGMENT LAYOUT



Luminaire type segment

## TECHNICAL DRAWING

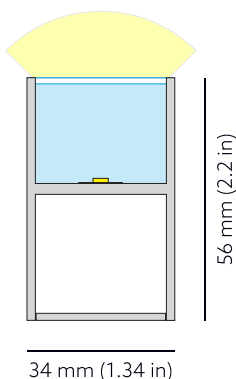

<b>SPECTRUM (WHITE LED)</b>	2200K
	CRI 80+
	3-Step MacAdam

<b>COVER</b>	Opal
--------------	------

<b>LUMINOUS FLUX*</b>	Per segment: 25 lm
	Light source (per segment): 100 lm
	Per meter/feet: 396 lm/m   121 lm/ft
	RGB only: 141 lm/m

<b>EFFICACY</b>	Luminaire: 14 lm/W
	Light source: 56 lm/W

<b>LIFETIME</b>	L90B10 60.000h
-----------------	----------------

<b>HOUSING</b>	Aluminum, polyurethane
----------------	------------------------

<b>ELECTRICAL</b>	Segment power: 1.8 W
	Power per meter/feet: 14.4 W/m
	Voltage: 24 VDC

<b>TEMPERATURE</b>	Tc max <75°C ( 167°F )
	Operating: -25°C...+50°C ( -13°F...122°F )

<b>OTHER DETAILS</b>	IP67 protection
	Dimmable
	Install in well-ventilated areas only

<b>DIMENSIONS</b>	Width: 34 mm   1.34"
	Height: 56 mm   2.20"
	Length: 128 mm   0.4'

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.