

# ULA L IP67 RGBW LIGHT

## ULA L IP67 LUM RGBW-48-14/L3-822 AG L500

Luminaire segment

Product code: UL67 LUM OP RGBW48-14L3-822 AG 0500


Article No.: C6ABKECABXXB0500




### COLORS



### PHOTOMETRICS




### SEGMENT LAYOUT



Luminaire type segment

### TECHNICAL DRAWING

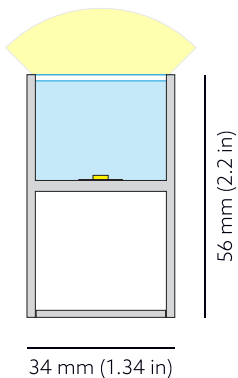

<b>SPECTRUM (WHITE LED)</b>	2200K CRI 80+ 3-Step MacAdam
-----------------------------	------------------------------------

<b>COVER</b>	Opal
--------------	------

<b>LUMINOUS FLUX*</b>	Per segment: 98 lm Light source (per segment): 400 lm  Per meter/feet: 396 lm/m   121 lm/ft RGB only: 141 lm/m
-----------------------	--

<b>EFFICACY</b>	Luminaire: 14 lm/W Light source: 56 lm/W
-----------------	---

<b>LIFETIME</b>	L90B10 60.000h
-----------------	----------------

<b>HOUSING</b>	Aluminum, polyurethane
----------------	------------------------

<b>ELECTRICAL</b>	Segment power: 7.2 W Power per meter/feet: 14.4 W/m Voltage: 24 VDC
-------------------	---

<b>TEMPERATURE</b>	Tc max <75°C ( 167°F ) Operating: -25°C...+50°C ( -13°F...122°F )
--------------------	--

<b>OTHER DETAILS</b>	IP67 protection Dimmable Install in well-ventilated areas only
----------------------	--

<b>DIMENSIONS</b>	Width: 34 mm   1.34" Height: 56 mm   2.20" Length: 503 mm   1.7'
-------------------	--

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.