

ULA L IP67 RGBW LIGHT

ULA L IP67 LUM RGBW-48-14/L3-822 AG L750

Luminaire segment

Product code: UL67 LUM OP RGBW48-14L3-822 AG 0750


Article No.: C6ABKECABXXB0750




COLORS



PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

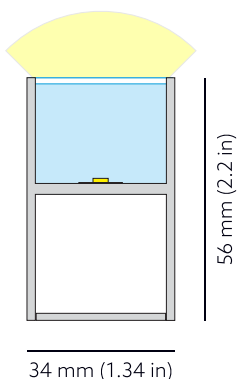

SPECTRUM (WHITE LED)	2200K CRI 80+ 3-Step MacAdam
-----------------------------	------------------------------------

COVER	Opal
--------------	------

LUMINOUS FLUX*	Per segment: 147 lm Light source (per segment): 599 lm Per meter/feet: 396 lm/m 121 lm/ft RGB only: 141 lm/m
-----------------------	---

EFFICACY	Luminaire: 14 lm/W Light source: 55 lm/W
-----------------	---

LIFETIME	L90B10 60.000h
-----------------	----------------

HOUSING	Aluminum, polyurethane
----------------	------------------------

ELECTRICAL	Segment power: 10.8 W Power per meter/feet: 14.4 W/m Voltage: 24 VDC
-------------------	--

TEMPERATURE	Tc max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)
--------------------	--

OTHER DETAILS	IP67 protection Dimmable Install in well-ventilated areas only
----------------------	--

DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 753 mm 2.5'
-------------------	--

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.