

ULA L IP67 WHITE LIGHT

UlaL.IP67 A1112 IEC AG EOP / FL-112/Nx G4 019W 820 L1000


Luminaire segment




COLORS

 Grey housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

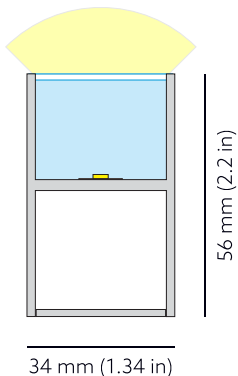

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

SPECTRUM

2000K
CRI 80+
3-Step MacAdam

COVER

Opal

LUMINOUS FLUX*

Per segment: 1002 lm
Light source (per segment): 2021 lm
Per meter/feet: 1002 lm/m | 305 lm/ft

EFFICACY

Luminaire: 52 lm/W
Light source: 105 lm/W

LIFETIME

L90B10 60.000h

HOUSING

Aluminum, polyurethane

ELECTRICAL

Segment power: 19.2 W
Power per meter/feet: 19.2 W/m
Voltage: 24 VDC

TEMPERATURE

Tc max <75°C (167°F)
Operating: -25°C...+50°C (-13°F...122°F)

OTHER DETAILS

IP67 protection
Dimmable
Install in well-ventilated areas only

DIMENSIONS

Width: 34 mm | 1.34"
Height: 56 mm | 2.20"
Length: 1003 mm | 3.3'