

ULA L IP67 WHITE LIGHT

ULA L IP67 LUM FL-56-19/N3-820 AG L500

Luminaire segment

Product code: UL67 LUM OP FL56-19N3-820 AG 0500


Article No.: C6ABBADAAXXB0500




COLORS



PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

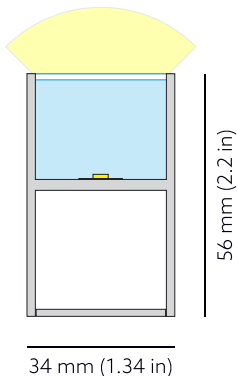

SPECTRUM	2000K CRI 80+ 3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Per segment: 485 lm Light source (per segment): 977 lm Per meter/feet: 969 lm/m 295 lm/ft
EFFICACY	Luminaire: 51 lm/W Light source: 102 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, polyurethane
ELECTRICAL	Segment power: 9.6 W Power per meter/feet: 19.2 W/m Voltage: 24 VDC
TEMPERATURE	Tc max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)
OTHER DETAILS	IP67 protection Dimmable Install in well-ventilated areas only
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 503 mm 1.7'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.