

ULA L IP67 WHITE LIGHT

UlaL.IP67 A1112 IEC AG EOP / FL-56/Nx G4 019W 820 L750


Luminaire segment




COLORS

 Grey housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

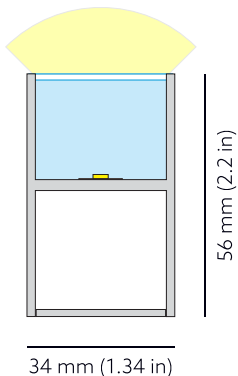

SPECTRUM	2000K CRI 80+ 3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Per segment: 727 lm Light source (per segment): 1466 lm Per meter/feet: 969 lm/m 295 lm/ft
EFFICACY	Luminaire: 50 lm/W Light source: 102 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, polyurethane
ELECTRICAL	Segment power: 14.4 W Power per meter/feet: 19.2 W/m Voltage: 24 VDC
TEMPERATURE	Tc max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)
OTHER DETAILS	IP67 protection Dimmable Install in well-ventilated areas only
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 753 mm 2.5'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.