

ULA L IP67 WHITE LIGHT

ULA L IP67 LUM FL-56-19/N3-820 AG L875

Luminaire segment

Product code: UL67 LUM OP FL56-19N3-820 AG 0875


Article No.: C6ABBADAAXXB0875




COLORS



PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

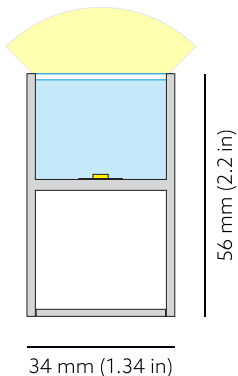

SPECTRUM

2000K
CRI 80+
3-Step MacAdam

COVER

Opal

LUMINOUS FLUX*

Per segment: 848 lm
Light source (per segment): 1710 lm
Per meter/feet: 969 lm/m | 295 lm/ft

EFFICACY

Luminaire: 50 lm/W
Light source: 102 lm/W

LIFETIME

L90B10 60.000h

HOUSING

Aluminum, polyurethane

ELECTRICAL

Segment power: 16.8 W
Power per meter/feet: 19.2 W/m
Voltage: 24 VDC

TEMPERATURE

Tc max <75°C (167°F)
Operating: -25°C...+50°C (-13°F...122°F)

OTHER DETAILS

IP67 protection
Dimmable
Install in well-ventilated areas only

DIMENSIONS

Width: 34 mm | 1.34"
Height: 56 mm | 2.20"
Length: 878 mm | 2.9'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.