



# XLINe IP67 RGB


xLine A017M IEC AGY EOP / RGB48/Nx G4 011W L1000  
Luminaire segment




## COLORS

 Grey housing

## PHOTOMETRICS




## SEGMENT LAYOUT




Luminaire type segment

## CONNECTION TYPE



End exit wire

## TECHNICAL DRAWING

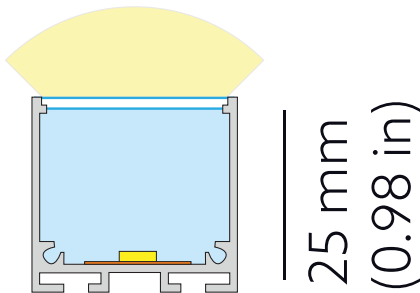

26 mm  
(1.02 in)

25 mm  
(0.98 in)

## SPECTRUM

3-Step MacAdam

## COVER

Opal

## LUMINOUS FLUX

Per segment: 97 lm  
Light source (per segment): 480 lm

### Per meter/feet:

Total: 97 Lm/m | 29 Lm/ft  
Red: 28 Lm/m | 9 Lm/ft  
Green: 82 Lm/m | 25 Lm/ft  
Blue: 18 Lm/m | 5 Lm/ft

## EFFICACY

Luminaire: 8 lm/W  
Light source: 42 lm/W

## LIFETIME

L70B50 50.000h

## HOUSING

Aluminum, polyurethane

## ELECTRICAL

Segment power: 11.5 W  
Power per meter/feet: 11.52 W/m  
Voltage: 24 VDC

## TEMPERATURE

T<sub>c</sub> max <75°C ( 167°F)  
Operating: -25°C...+50°C ( -13°F...122°F)

## OTHER DETAILS

IP67 protection  
Dimmable  
Install in well-ventilated areas only

## DIMENSIONS

Width: 26 mm (1.02")  
Height: 25 mm (0.98")  
Length: 1004 mm | 3.3'