



xLINE IP67 RGB

xLine A017M IEC AGY EOP / RGB48/Nx G4 07W L1000


Luminaire segment




COLORS

Grey housing

PHOTOMETRICS




SEGMENT LAYOUT




Luminaire type segment

CONNECTION TYPE



Side exit wire

TECHNICAL DRAWING

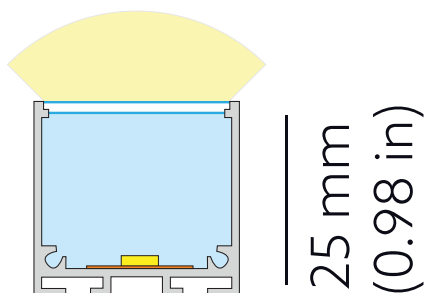

26 mm
(1.02 in)

SPECTRUM	3-Step MacAdam
COVER	Opal
LUMINOUS FLUX	<p>Per segment: 64 lm Light source (per segment): 316 lm</p> <p>Per meter/feet: Total: 64 Lm/m 19 Lm/ft Red: 17 Lm/m 5 Lm/ft Green: 56 Lm/m 17 Lm/ft Blue: 11 Lm/m 3 Lm/ft</p>
EFFICACY	<p>Luminaire: 9 lm/W Light source: 44 lm/W</p>
LIFETIME	L70B50 50.000h
HOUSING	Aluminum, polyurethane
ELECTRICAL	<p>Segment power: 7.2 W Power per meter/feet: 7.2 W/m Voltage: 24 VDC</p>
TEMPERATURE	<p>T_c max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)</p>
OTHER DETAILS	<p>IP67 protection Dimmable Install in well-ventilated areas only</p>
DIMENSIONS	<p>Width: 26 mm (1.02") Height: 25 mm (0.98") Length: 1004 mm 3.3'</p>

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.