



# XLINE IP67 RGB


xLine A017M IEC PWE EOP / RGB48/Nx G4 011W L1000  
Luminaire segment




## COLORS

White housing

## PHOTOMETRICS




## SEGMENT LAYOUT




Luminaire type segment

## CONNECTION TYPE



End exit wire

## TECHNICAL DRAWING

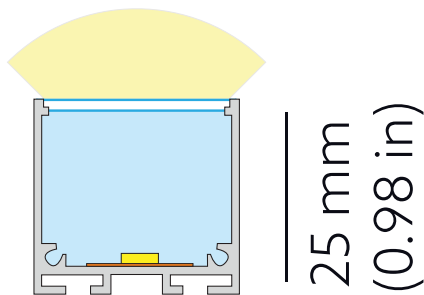

26 mm  
(1.02 in)

<b>SPECTRUM</b>	3-Step MacAdam
<b>COVER</b>	Opal
<b>LUMINOUS FLUX</b>	<p>Per segment: 97 lm Light source (per segment): 480 lm</p> <p>Per meter/feet: Total: 97 Lm/m   29 Lm/ft Red: 28 Lm/m   9 Lm/ft Green: 82 Lm/m   25 Lm/ft Blue: 18 Lm/m   5 Lm/ft</p>
<b>EFFICACY</b>	<p>Luminaire: 8 lm/W Light source: 42 lm/W</p>
<b>LIFETIME</b>	L70B50 50.000h
<b>HOUSING</b>	Aluminum, polyurethane
<b>ELECTRICAL</b>	<p>Segment power: 11.5 W Power per meter/feet: 11.52 W/m Voltage: 24 VDC</p>
<b>TEMPERATURE</b>	<p>Tc max &lt;75°C ( 167°F ) Operating: -25°C...+50°C ( -13°F...122°F )</p>
<b>OTHER DETAILS</b>	<p>IP67 protection Dimmable Install in well-ventilated areas only</p>
<b>DIMENSIONS</b>	<p>Width: 26 mm (1.02") Height: 25 mm (0.98") Length: 1004 mm   3.3'</p>

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.