



xLINE IP67 RGB

xLine A017M IEC PBK EOP / RGB48/Nx G4 011W L1000


Luminaire segment




COLORS

Black housing

PHOTOMETRICS




SEGMENT LAYOUT




Luminaire type segment

CONNECTION TYPE



End exit wire

TECHNICAL DRAWING

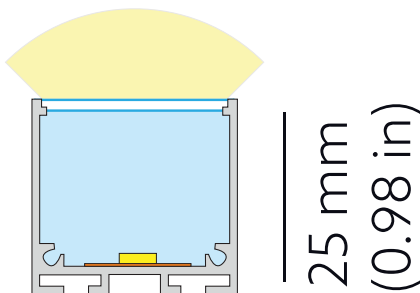

26 mm
(1.02 in)

SPECTRUM

3-Step MacAdam

COVER

Opal

LUMINOUS FLUX

Per segment: 97 lm

Light source (per segment): 480 lm

Per meter/feet:

Total: 97 Lm/m | 29 Lm/ft

Red: 28 Lm/m | 9 Lm/ft

Green: 82 Lm/m | 25 Lm/ft

Blue: 18 Lm/m | 5 Lm/ft

EFFICACY

Luminaire: 8 lm/W

Light source: 42 lm/W

LIFETIME

L70B50 50.000h

HOUSING

Aluminum, polyurethane

ELECTRICAL

Segment power: 11.5 W

Power per meter/feet: 11.52 W/m

Voltage: 24 VDC

TEMPERATURE

T_c max <75°C (167°F)

Operating: -25°C...+50°C (-13°F...122°F)

OTHER DETAILS

IP67 protection

Dimmable

Install in well-ventilated areas only

DIMENSIONS

Width: 26 mm (1.02")

Height: 25 mm (0.98")

Length: 1004 mm | 3.3'

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.