



# XLINE IP67 RGB


xLine A017M IEC PBK EOP / RGB48/Nx G4 07W L1000  
Luminaire segment




## COLORS

Black housing

## PHOTOMETRICS




## SEGMENT LAYOUT




Luminaire type segment

## CONNECTION TYPE



End exit wire

## TECHNICAL DRAWING

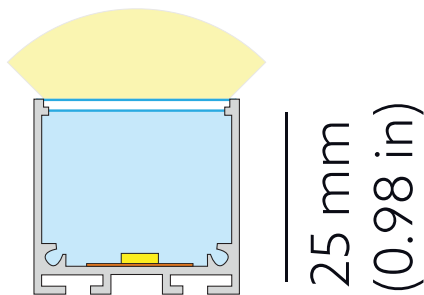

26 mm  
(1.02 in)

SPECTRUM	3-Step MacAdam
COVER	Opal
LUMINOUS FLUX	Per segment: 64 lm Light source (per segment): 316 lm  Per meter/feet: Total: 64 Lm/m   19 Lm/ft Red: 17 Lm/m   5 Lm/ft Green: 56 Lm/m   17 Lm/ft Blue: 11 Lm/m   3 Lm/ft
EFFICACY	Luminaire: 9 lm/W Light source: 44 lm/W
LIFETIME	L70B50 50.000h
HOUSING	Aluminum, polyurethane
ELECTRICAL	Segment power: 7.2 W Power per meter/feet: 7.2 W/m Voltage: 24 VDC
TEMPERATURE	Tc max <75°C ( 167°F ) Operating: -25°C...+50°C ( -13°F...122°F )
OTHER DETAILS	IP67 protection Dimmable Install in well-ventilated areas only
DIMENSIONS	Width: 26 mm (1.02") Height: 25 mm (0.98") Length: 1004 mm   3.3'

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.