




Area: Indoor Luminaires



Category: Linear lighting / decorative lighting / Cove

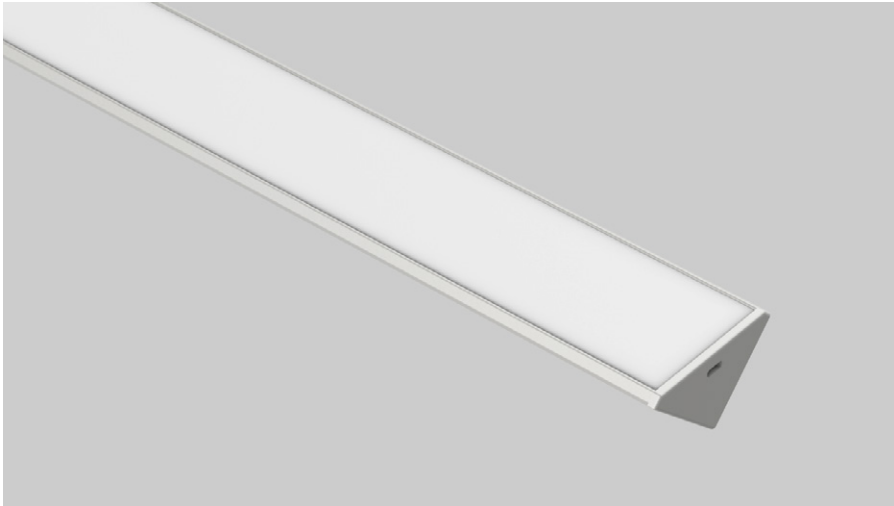


Mounting: Corner mounting

A032x corner-mounted fixture made for high power LED strips. Ideal for under-cabinet, task and accent lighting.

Take advantage of widest CCT range and customize A032x with Tunable white, RGB, RGBW LED strips and to make the most of task and accent lighting.

Fixtures can be linked up to 14m (46') depending on the output.



TECHNICAL DATA

Voltage	24 V / 48 V
LED lumen maintenance	L90B10 > 60.000 h
Light engine	Any LED strip up to 14 W/m
Control	Dimmable



PROJECT

DATE

QUANTITY

NOTES

ORDER CODE

NAME	SEGMENT TYPE	HOUSING COLOR	COVER	LUMINAIRE LENGTH	LED SOURCE	POWER	CRI 1	CCT 1
FXL.A032x								
CRI 2	CCT 2	STRIP LENGTH	CABLE TYPE	CONNECTOR	CABLE LENGTH	STANDART NAME	PACKING	
			HR			STD	PH	

SEGMENT TYPE	I individual luminaire, 2 end caps	S start segment, back / end wire exit, 1 end cap	M middle segment, back / end wire exit, no end caps	E end segment, back / end wire exit, 1 end cap	F full module, 2 end cap											
WIRE EXIT	B back	E end														
HOUSING COLOR	AGY anodized gray	PWE white	PBK black	CUSTOM contact sales												
COVER	32X.1.OPL opal	32X.2.OPL opal round														
LED SOURCE cutting increment	FL28/NX static white 250mm(9.9 in)	FL28/DX static white 250mm(9.9 in)	FL56E/NX static white 125 mm (4.92")	FL56E/DX static white 125 mm (4.92")	FL56/NX static white 125 mm (4.92")	FL56/DX static white 125 mm (4.92")	FL60E/NX static white 100mm (3.93")	FL60E/DX static white 100mm (3.93")	FL112/NX static white 62.5 mm (2.46")	FL112/DX static white 62.5 mm (2.46")						
	FL120E/NX static white 50 mm (1.96")	FL120E/DX static white 50 mm (1.96")	FL175/NX static white 40 mm (1.57")	FL175/DX static white 40 mm (1.57")	FL112/NX.48V static white 125 mm (4.92")	FL112/DX.48V static white 125 mm (4.92")	TWD112/NX tunable white 62.5 mm (2.46")									
	TW56/NN tunable white 125 mm (4.92")	TW70/NN tunable white 100mm (3.93")	TW56/DD tunable white 125 mm (4.92")	TW70/DD tunable white 100mm (3.93")	RGB48/NX RGB 125 mm (4.92")	RGB96/NX RGB 62.5 mm (2.46")	RGBW48/NN RGBW 125 mm (4.92")	RGBW48/ND RGBW 125 mm (4.92")								
POWER	1W 1,2W/m 0,37W/ft static white	2W 2,4 W/m 0.7 W/ft static white	4W 4,8 W/m 1.5 W/ft static white	7W 7,2 W/m 2.1 W/ft RGB	9W 9,6 W/m 2.9 W/ft static white, TW, RGBW	11W 11,52 W/m 3.5 W/ft RGB	14W 14,4 W/m 4.4 W/ft static white, RGB, RGBW									
CRI 1	9 CRI 90+	T9 CRI90+tri	0 CRI95+ *for Nx LED strip only	P Optisolis *for Nx LED strip only								X Color *for Nx LED strip only				
CCT 1	18 1800K	20 2000K	22 2200K	25 2500K	27 2700K	30 3000K	35 3500K	40 4000K	50 5000K	57 5700K	65 6500K	27-65 2700K - 6500K TW	BL blue color	GR green color	RE red color	
CRI 2	9 CRI 90+	T9 CRI90+tri	0 CRI95+ *for Nx LED strip only	P Optisolis *for Nx LED strip only								X none				
CCT 2	18 1800K	20 2000K	22 2200K	25 2500K	27 2700K	30 3000K	35 3500K	40 4000K	50 5000K	57 5700K	65 6500K	50 5000K	27-65 2700K - 6500K TW	XX none		
CONNECTOR	NON no connectors	P1X connector P1X														
CABLE LENGTH	L200 200 mm 7.9" Default	L500 500 mm 1' 7.7"	L1000 1000 mm 3' 3.4"	L2000 2000 mm 5' 6.7"	L3000 3000 mm 9' 10.1"	L5000 5000 mm 16' 4.9"	L9000 9000 mm 29' 6.3"									

PROJECT

DATE

QUANTITY

NOTES

ORDER CODE

NAME	SEGMENT TYPE	HOUSING COLOR	COVER	LUMINAIRE LENGTH	LED SOURCE	POWER	CRI 1	CCT 1
FXL.A032x							T9	
CRI 2	CCT 2 (only for TW strip)	STRIP LENGTH	CABLE TYPE	CONNECTOR	CABLE LENGTH	STANDART NAME	PACKING	
T9			HR			STD	PH	

SEGMENT TYPE	I individual luminaire, 2 end caps	S start segment, back / side wire exit, 1 end cap	M middle segment, back / side wire exit, no end caps	E end segment, back / side wire exit, 1 end cap	F full module, 2 end cap			
WIRE EXIT	B back	E end						
HOUSING COLOR	AGY anodized gray	PWE white	PBK black		CUSTOM contact sales			
COVER	32X.1.OPL opal	32X.2.OPL opal round homogenous						
LED SOURCE	FL112/NX static white 62.5 mm (2.46")	TW70/NN tunable white 100mm (3.93")	RGB96/NX RGB 62.5 mm (2.46")	RGBW48/NN RGBW 125 mm (4.92")				
POWER	4W 4,8 W/m 1.5 W/ft 737 Lm/m (225 Lm/ft)* LOR	9W 9,6 W/m 2.9 W/ft 1469 Lm/m (448 Lm/ft)* LOR	11W 11,52 W/m 3.5 W/ft 479 Lm/m (146 Lm/ft)* LOR	14W 14,4 W/m 4.4 W/ft 2170 Lm/m (662 Lm/ft)* LOR	9W 4,8 W/m 1.5 W/ft 608 Lm/m (185 Lm/ft)* LOR	14W 9,6 W/m 2.9 W/ft 886 Lm/m (270 Lm/ft)* LOR		
CCT 1	18 / 20 / 22 / 25 / 27 / 30 / 35 / 40 / 50 / 57 / 65 1800K / 2000K / 2200K / 2500K / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K	27-65 2700K - 6500K			18 / 20 / 22 / 25 / 27 / 30 / 35 / 40 / 50 / 57 / 65 1800K / 2000K / 2200K / 2500K / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K			
CONNECTOR	NON no connectors	P1X connector P1X						
CABLE LENGTH	L200 200 mm 7.9" Default	L500 500 mm 1' 7.7"	L1000 1000 mm 3' 3.4"	L2000 2000 mm 5' 6.7"	L3000 3000 mm 9' 10.1"	L5000 5000 mm 16' 4.9"	L9000 9000 mm 29' 6.3"	

Lumen values is from bare LED strip. When assembled in profile, lumen value must be multiplied by LOR percentage to retrieve actual lumen value of assembled solution

*The LOR was calculated using a white profile. The values may vary when using profiles of other colors.

CCT	1800K	2000K	2200K	2500K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
MULTIPLIER NICH	0.54	0.58	0.63	0.68	0.95	1.00	1.02	1.04	1.04	1.01	1.01

LED STRIP LENGTH

For 62.5mm (2.46")																										
LED strip cutting increment		L0063	L0125	L0188	L0250	L0313	L0375	L0438	L0500	L563	L0625	L0688	L0750	L0813	L0875	L0938	L1000	L1063	L1125	L1188	L1250	L1313	L1375	L1438	L1500	
mm	63	125	188	250	313	375	438	500	563	625	688	750	813	875	938	1000	1063	1125	1188	1250	1313	1375	1438	1500		
in	2.5"	4.9"	7.4"	9.8"	1' 0.3"	1' 2.8"	1' 5.2"	1' 7.7"	1' 10.2"	2' 0.6"	2' 3.1"	2' 5.5"	2' 8"	2' 10.4"	3' 0.9"	3' 3.4"	3' 5.9"	3' 8.3"	3' 10.8"	4' 1.2"	4' 3.7"	4' 6.1"	4' 8.6"	4' 11"		
		L1563	L1625	L1688	L1750	L1813	L1875	L1938	L2000	L2063	L2125	L2188	L2250	L2313	L2375	L2438	L2500	L2563	L2625	L2688	L2750	L2813	L2875	L2938	L3000	
mm	1563	1625	1688	1750	1813	1875	1938	2000	2063	2125	2188	2250	2313	2375	2438	2500	2563	2625	2688	2750	2813	2875	2938	3000		
in	5' 1.5"	5' 4"	5' 6.5"	5' 8.9"	5' 11.4"	6' 1.8"	6' 4.3"	6' 6.7"	6' 9.2"	6' 11.7"	7' 2.1"	7' 0.6"	7' 7.1"	7' 9.5"	7' 12"	8' 2.4"	8' 4.9"	8' 7.3"	8' 9.8"	9' 0.3"	9' 2.7"	9' 5.2"	9' 7.7"	9' 10.1"		
For 100 mm (3.93")																										
LED strip cutting increment		L10100	L03000	L04000	L05000	L06000	L07000	L08000	L09000	L10000	L11000	L12000	L13000	L14000	L15000	L16000	L17000	L18000	L19000	L20000	L21000	L22000	L23000	L24000	L25000	
mm	100	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2600	2400	2500		
in	3.9"	11.8"	1' 3.7"	1' 7.7"	1' 11.6"	2' 3.6"	2' 7.5"	2' 11.4"	3' 3.4"	3' 7.3"	3' 11.2"	4' 3.2"	4' 7.1"	4' 11"	5' 3"	5' 6.9"	5' 10.9"	6' 2.8"	6' 6.7"	6' 10.7"	7' 2.6"	8' 6.4"	7' 10.5"	8' 2.4"		
		L26000	L27000	L28000	L29000	L30000																				
mm	2600	2700	2800	2900	3000																					
in	8' 6.4"	8' 10.3"	9' 2.2"	9' 6.2"	9' 10.1"																					
For 125 mm (4.92")																										
LED strip cutting increment		L0125	L0250	L0375	L0500	L0625	L0750	L0875	L1000	L1125	L1250	L1375	L1500	L1625	L1750	L1875	L2000	L2125	L2250	L2375	L2500	L2625	L2750	L2875	L3000	
mm	125	250	375	500	625	750	875	1000	1125	1250	1375	1500	1625	1750	1875	2000	2125	2250	2375	2500	2625	2750	2875	3000		
in	4.9"	9.8"	1' 2.8"	1' 7.7"	2' 0.6"	2' 5.5"	2' 10.4"	3' 3.4"	3' 8.3"	4' 1.2"	4' 6.1"	4' 11.1"	5' 4"	5' 8.9"	6' 1.8"	6' 6.7"	6' 11.7"	7' 4.6"	7' 9.5"	8' 2.4"	8' 7.3"	9' 0.3"	9' 5.2"	9' 10.1"		



Module length = LED Strip Length + Offset


Offsets:

- Start module:5 mm (0.2 in)
- Middle module:2 mm (0.08 in)
- End module:5 mm (0.2 in)
- Individual, end cable exit:12 mm (0.47 in)
- Individual, back cable exit:8 mm (0.32 in)
- Full end cable exit:16 mm (0.63 in)
- Full back cable exit:8 mm (0.32 in)


i.e. Start module length for L2000 LED strip is:
Start module length = 2000mm + 5 mm
Note: Length tolerance ± 3mm/m (0.11 in)


COVERS



CODE	DESCRIPTION
PRG.A032X.C01.OPL	
	Opal
PRG.A032X.C02.OPL	
	Opal round


ACCESSORIES




CODE	DESCRIPTION
PRG.A032X.F01.GZK	
	Zink holder

DIMENSIONS


LUMINAIRE
One cable, two endcaps

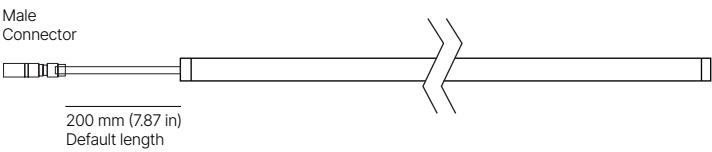


START
Two cables, endcap at the start

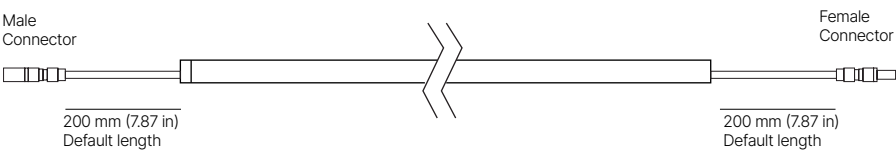


MIDDLE
Two cables, no endcaps

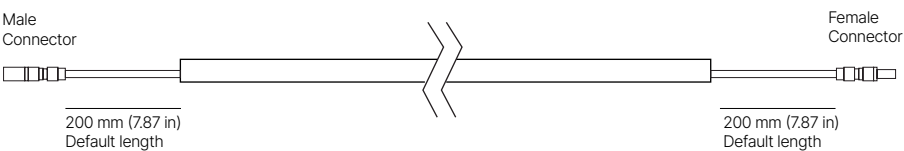


END
One cable, endcap at the end

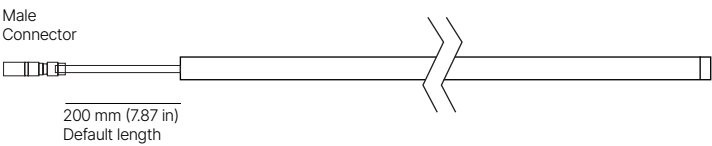

FULL MODULE
Two cables, two endcaps

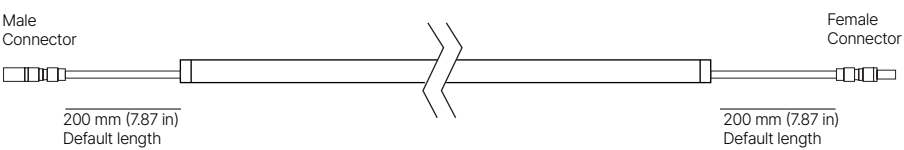

WIRE EXIT




END
Wire comes out from profile through endcap




BACK
Wire through a hole on the back of the profile

CONNECTION TYPES


INDIVIDUAL module

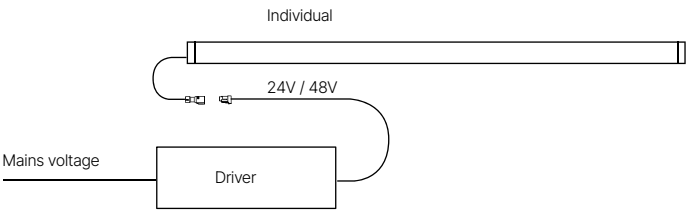

FULL module

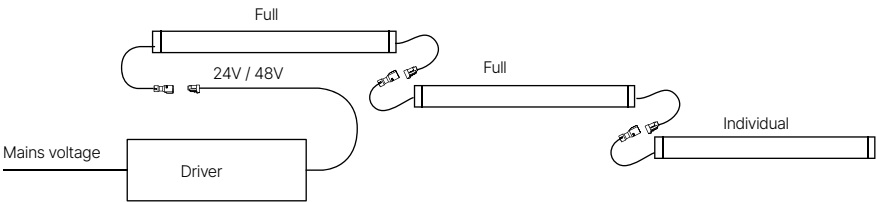


CONTINUOUS LINE module

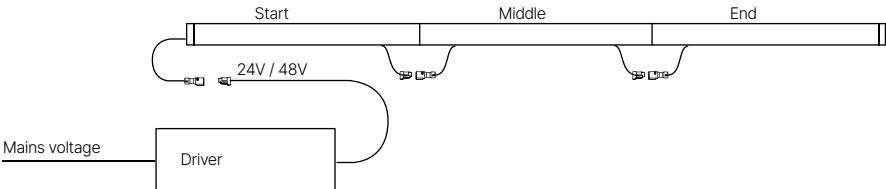

CONNECTORS & WIRES

INDOOR

P1X - MALE CONNECTORS

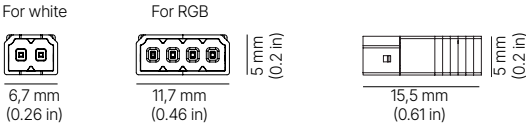

P1X - FEMALE CONNECTORS



WIRES



WIRE LENGTHS

CODE	L200	L500	L1000	L2000	L3000	L5000	L9000
LENGTH	200mm	500mm	1000mm	2000mm	3000mm	5000mm	9000mm
	7.9"	1' 7.7"	3' 3.4"	5' 6.7"	9' 10.1"	16' 4.9"	29' 6.3"

TECHNICAL SPECIFICATIONS

CERTIFICATIONS



UL approved



Made in Europe



L90B10
60.000 hours



CE compliant



5- year warranty



NICHIA LEDs



KEY BENEFITS



3-step
MacAdam LEDs



Stabilized
current design



Wide 2000K-6500K
white color range



CRI 90 +
CRI 90+tri
CRI 95
Optisolis, RGB



Control sold separately;
DALI, Casambi,
1- 10V, Phase Cut



24V / 48V
voltage input



Customization for
your project



Ambient light



Available in any 0.5-3m
length



Reverse voltage
protection




External driver




Continuous line light
effect without dark spots

MAX RUN

Possible max length connected to driver from single side.

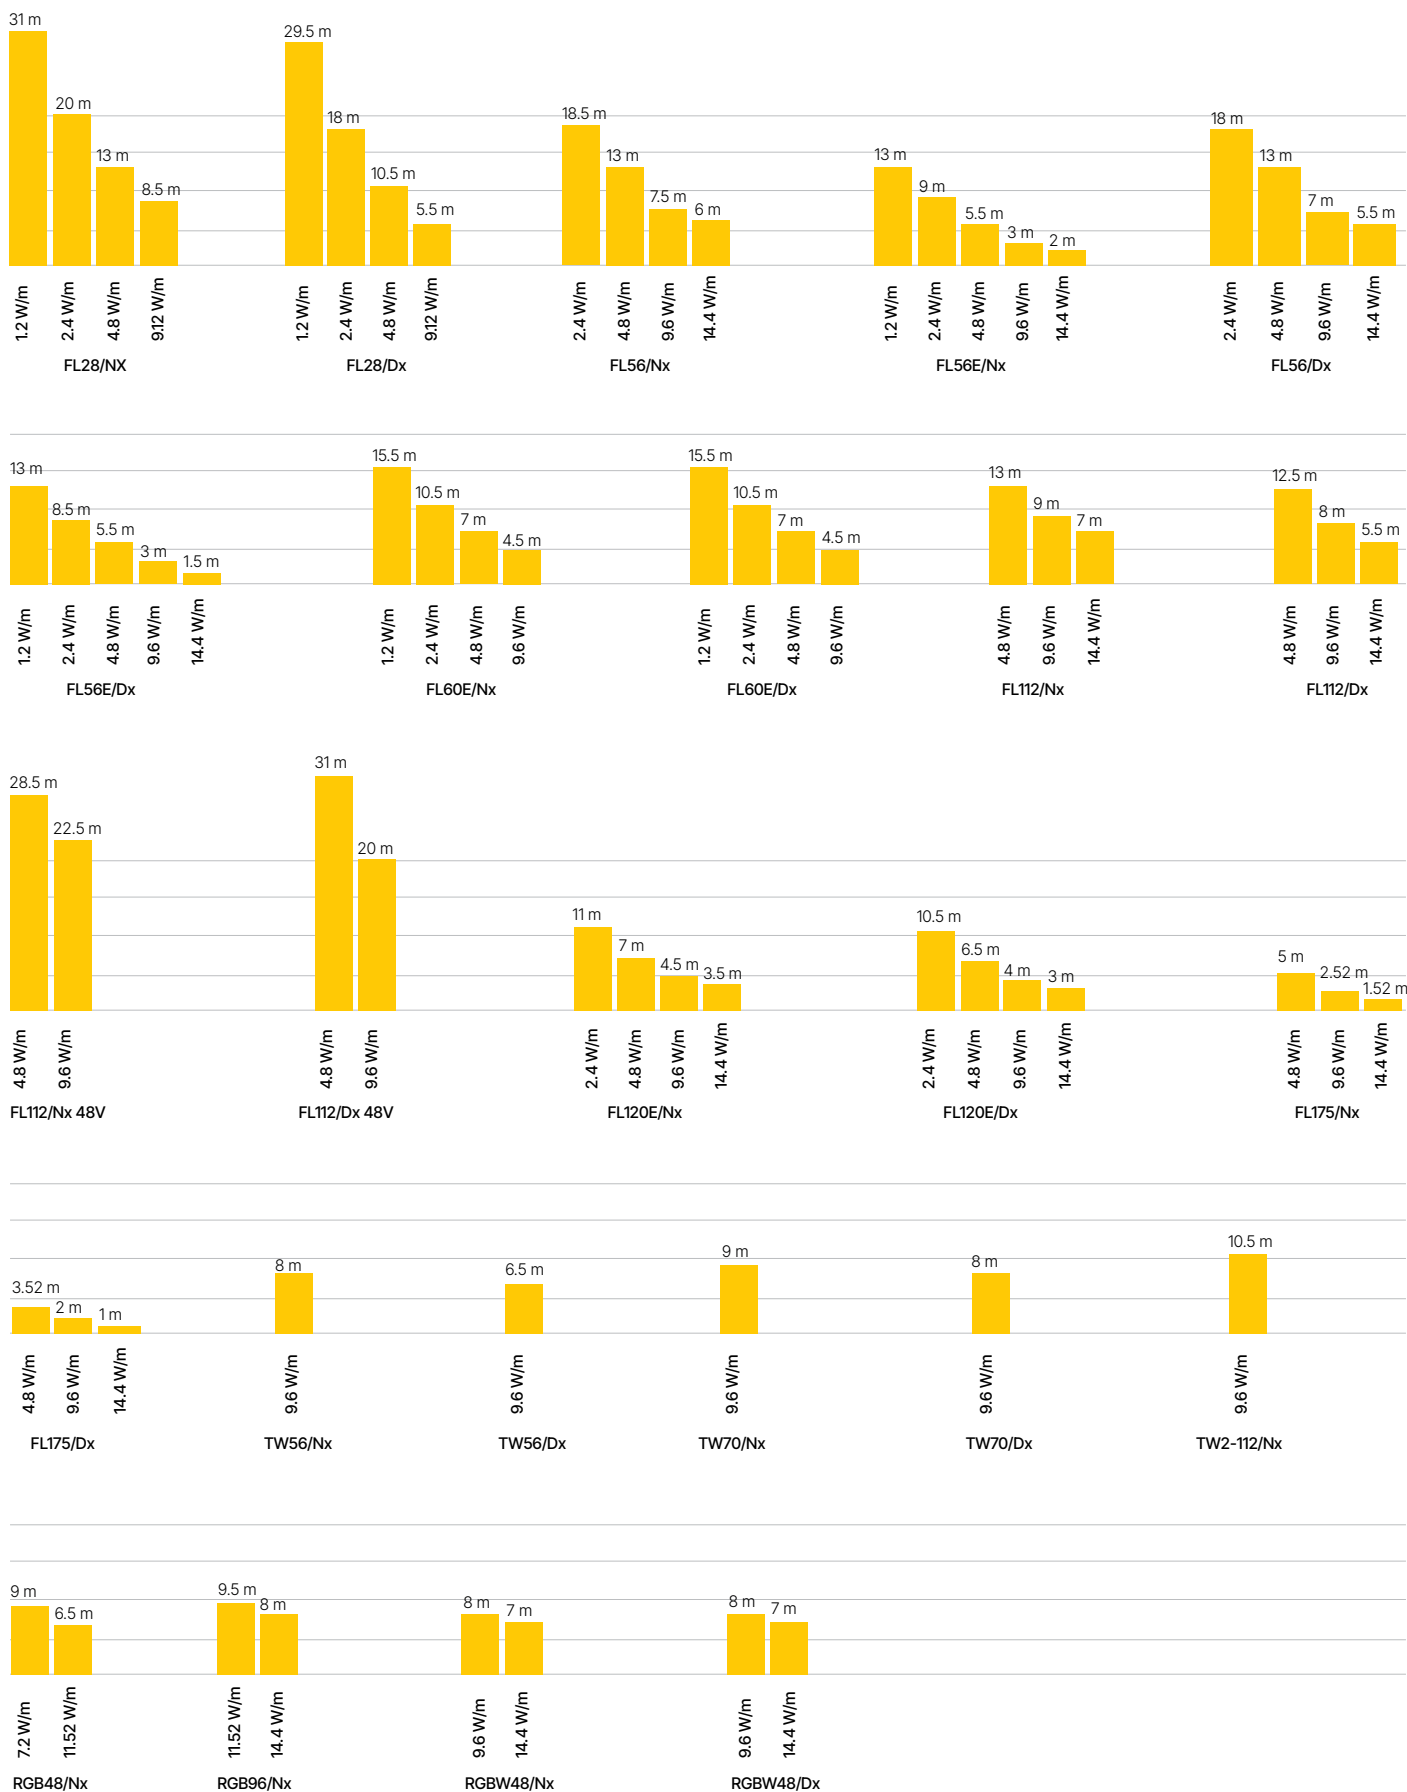

APPLICATIONS

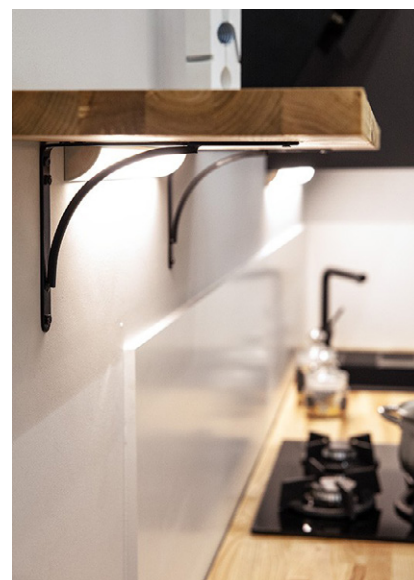

POWER SUPPLY - INDOOR**CODE****DESCRIPTION****DRI.V24.ILS.FO.SE.00001****FIXED OUTPUT**

100W 120 VAC (for NA) 220 - 240 VAC (for EU)

5 - year warranty

Color: Static White

Voltage: 24V DC

Control: FO



POWER SUPPLY - OUTDOOR**CODE****DESCRIPTION****DRI.V24.OCO.FO.TR.00030****FIXED OUTPUT**

96W 24V 90 - 305 VAC

5 - year warranty

Color: Static White

Voltage: 24V DC

Control: FO

**DRI.V24.OCO.DA.MW.00003****DALI**

120W 24V 100 - 240 VAC

5 - year warranty

Color: Static White

Voltage: 24V DC

Control: DA

**DRI.V24.OCO.FO.MW.00038****0-10V**

96W 24V 100 - 240 VAC

MeanWell CV+CC driver

5 - year warranty

Color: Static White

Voltage: 24V DC

PWM, Resistance

Dimming: 0-10V

199×63×35.5mm



MAX PRODUCT LENGTH

WHITE 24V

0.5mm ² (AWG 20)	4.8W/m (1.5W/ft)	9.6W/m (2.9W/ft)	14.4W/m (4.4W/ft)	19.2W/m (5.9W/ft)
Max cable length between luminaire and driver	Product max run			
1 m	12.5 m	8 m	6 m	4.5 m
2 m	12 m	7.5 m	6 m	4 m
3 m	11.5 m	7.5 m	5.5 m	3.5 m
5 m	11 m	7 m	5 m	3 m
10 m	8.5 m	5 m	3 m	0 m
1.5mm² (AWG 16)				
Max cable length between luminaire and driver	Product max run			
1 m	12.5 m	8.5 m	4.5 m	4.5 m
2 m	12.5 m	8.5 m	4.5 m	4.5 m
3 m	12.5 m	8 m	4.5 m	4.5 m
5 m	12 m	8 m	4.5 m	4 m
10 m	11.5 m	7.5 m	4 m	3.5 m

WHITE 48V

0.5mm ² (AWG 20)	4.8W/m (1.5W/ft)	9.6W/m (2.9W/ft)	14.4W/m (4.4W/ft)	19.2W/m (5.9W/ft)
Max cable length between luminaire and driver	Product max run			
1 m	28 m	19.5 m	15 m	13 m
2 m	27.5 m	19 m	14.5 m	12.5 m
3 m	27 m	18.5 m	14 m	12 m
5 m	26.5 m	18 m	13 m	11 m
10 m	25 m	16.5 m	11.5 m	9 m
1.5mm² (AWG 16)				
Max cable length between luminaire and driver	Product max run			
1 m	28.5 m	20 m	15.5 m	13.5 m
2 m	28 m	19.5 m	15 m	13 m
3 m	27.5 m	19.5 m	15 m	13 m
5 m	27.5 m	19 m	14.5 m	12.5 m
10 m	27 m	18.5 m	14 m	12 m

24V TW 56 N5

0.5mm ² (AWG 20)	9.6W/m (2.9W/ft)	19.2W/m (5.9W/ft)	33.6W/m (10.2W/ft)
Max cable length between luminaire and driver	Product max run		
1 m	7.5 m	4.5 m	2.5 m
2 m	7 m	4 m	2.5 m
3 m	7 m	4 m	2.5 m
5 m	6.5 m	4 m	2.5 m
10 m	5.5 m	3.5 m	2 m
1.5mm² (AWG 16)			
Max cable length between luminaire and driver	Product max run		
1 m	7.5 m	4.5 m	2.5 m
2 m	7.5 m	4 m	2.5 m
3 m	7.5 m	4 m	2.5 m
5 m	7.5 m	4 m	2.5 m
10 m	7 m	4 m	2.5 m

24V TW 70 N5

0.5mm ² (AWG 20)	9.6W/m (2.9W/ft)	19.2W/m (5.9W/ft)	33.6W/m (10.2W/ft)	45.6W/m (14.6W/ft)
Max cable length between luminaire and driver	Product max run			
1 m	7.5 m	4.5 m	2.5 m	1.5 m
2 m	7.5 m	4 m	2.5 m	1.5 m
3 m	7.5 m	4 m	2.5 m	1.5 m
5 m	7 m	4 m	2 m	1.5 m
10 m	6.5 m	3.5 m	1.5 m	1 m
1.5mm² (AWG 16)				
Max cable length between luminaire and driver	Product max run			
1 m	7.5 m	4.5 m	2.5 m	1.5 m
2 m	7.5 m	4 m	2.5 m	1.5 m
3 m	7.5 m	4 m	2.5 m	1.5 m
5 m	7.5 m	4 m	2.5 m	1.5 m
10 m	7.5 m	4 m	2 m	1.5 m

MAX PRODUCT LENGTH

24V TW2 112

0.5mm2 (AWG 20)	9.6W/m (2.9W/ft)	19.2W/m (5.9W/ft)	33.6W/m (10.2W/ft)	48W/m (14.6W/ft)
Max cable length between luminaire and driver	Product max run			
1 m	8 m	8 m	3 m	2.5 m
2 m	7.5 m	7.5 m	3 m	2.5 m
3 m	7.5 m	7.5 m	3 m	2 m
5 m	7 m	7 m	2.5 m	2 m
10 m	5.5 m	5.5 m	2 m	1.5 m
1.5mm2 (AWG 16)				
Max cable length between luminaire and driver	Product max run			
1 m	8 m	5 m	3 m	2.5 m
2 m	8 m	5 m	3 m	2.5 m
3 m	8 m	5 m	3 m	2.5 m
5 m	8 m	5 m	3 m	2.5 m
10 m	7.5 m	4.5 m	2.5 m	2 m









24V 48 RGB

0.5mm2 (AWG 20)	7.2W/m (2.2W/ft)	11.5W/m (1.5W/ft)
Max cable length between luminaire and driver	Product max run	
1 m	8.5 m	5.5 m
2 m	8 m	5.5 m
3 m	8 m	5 m
5 m	7.5 m	4.5 m
10 m	7 m	3.5 m
1.5mm2 (AWG 16)		
Max cable length between luminaire and driver	Product max run	
1 m	8.5 m	5.5 m
2 m	8.5 m	5.5 m
3 m	8.5 m	5.5 m
5 m	8.5 m	5.5 m
10 m	8 m	5 m

24V 96 RGB

0.5mm2 (AWG 20)	11.5W/m (1.5W/ft)	14.4W/m (4.4W/ft)	23W/m (4.4W/ft)
Max cable length between luminaire and driver	Product max run		
1 m	9 m	7.5 m	4.5 m
2 m	8.5 m	7 m	4 m
3 m	8.5 m	7 m	3.5 m
5 m	8 m	6 m	2.5 m
10 m	5.5 m	3.5 m	0
1.5mm2 (AWG 16)			
Max cable length between luminaire and driver	Product max run		
1 m	9 m	7.5 m	4.5 m
2 m	9 m	7.5 m	4.5 m
3 m	9 m	7.5 m	4.5 m
5 m	8.5 m	7 m	4 m
10 m	8 m	6.5 m	3.5 m

INSTALLATION GUIDE

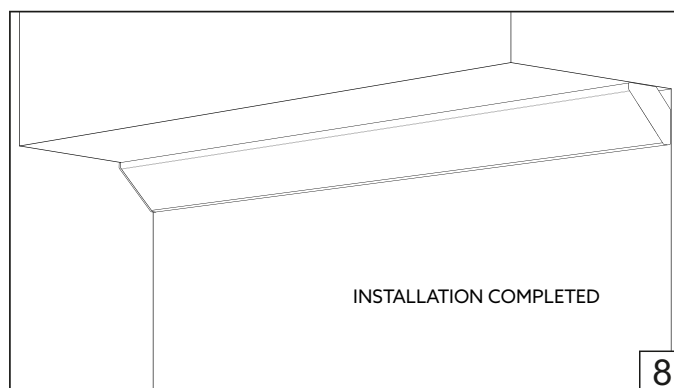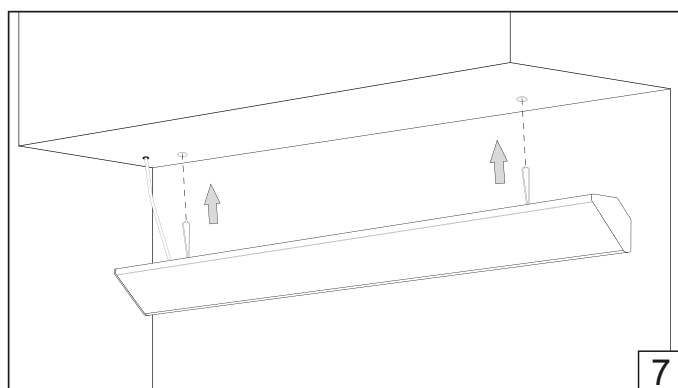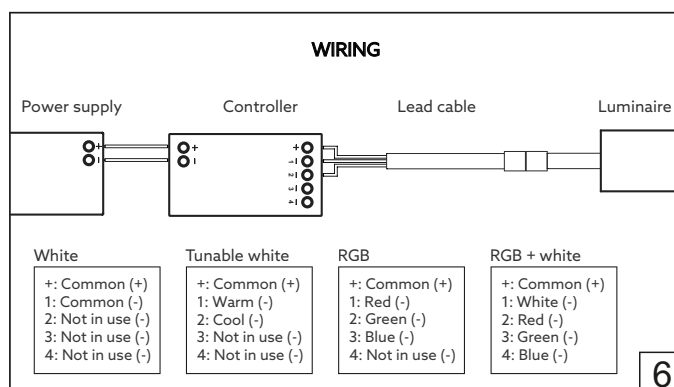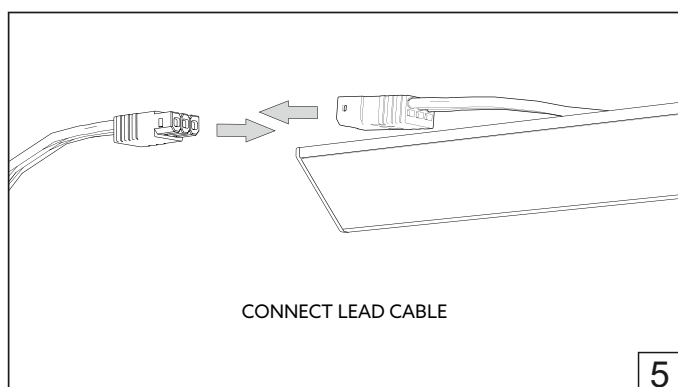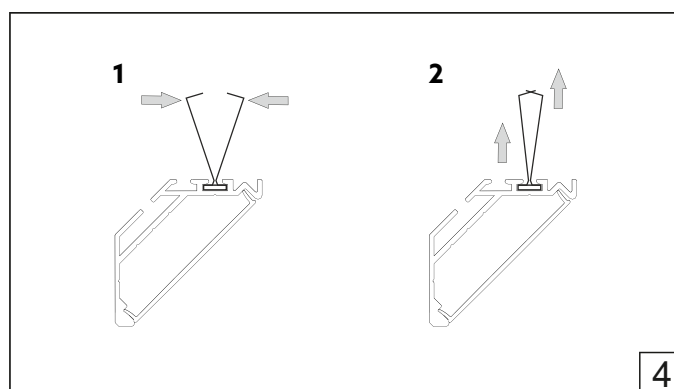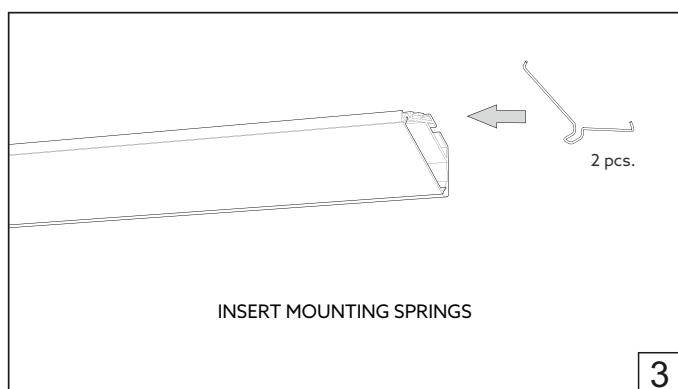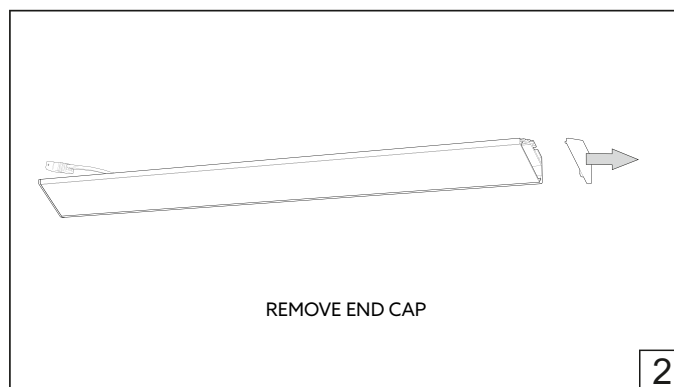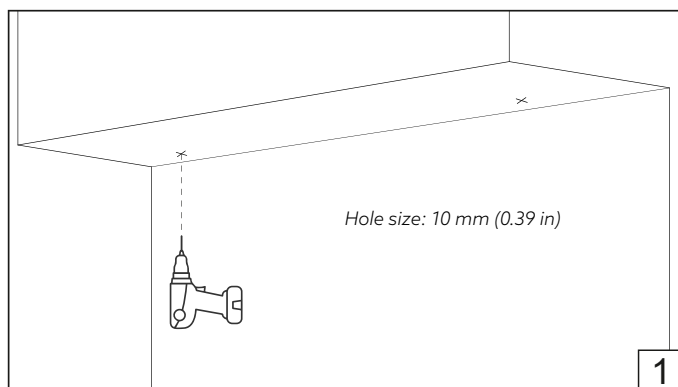

SAFETY / WARNINGS / DISCLOSURES

1. Install in accordance with national and local electrical code regulations.
2. Do not modify or disassemble this product beyond instructions or the warranty will be void.
3. Our channels, covers, end caps, and mounting brackets are also suitable for outdoor use with some considerations. Please consult with local Holecron representative to pick right fixtures for outdoor use.
4. Indoor (IP20) fixtures should never be mounted in areas receiving direct sunlight and locations where they can be submerged under water or might get in direct contact with water or puddling (rainfall, sprinkler, spray, etc.).
5. Avoid leaving gaps in any of the end cap or cover mating edges to the channel that will allow excess dust, debris, or water/moisture to enter the channel enclosure.
6. Actual product color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
7. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

SAFETY / WARNINGS / DISCLOSURES

LIMITED WARRANTY

This product has a five (5) year limited warranty from the date of shipment. This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available online [download here](#). For warranty related questions please contact product support.

CONSUMER'S ACKNOWLEDGMENT

Holecron stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Holecron is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Holecron to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues.

Any statement from a Holecron employee or agent regarding a customer's bill of goods and/ or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets. There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect.

Holecron strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Holecron products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Holecron product specifications can make the requisite decisions appropriate for a successful finished lighting application.

HOLECTRON

HOLECTRON. All rights reserved.
Specifications are subject to change without notice.
Phone: +370 612 42446
email: info@holecron.com | www.holecron.com