

**HOLECTRON**

**Sleeves IP65**



3 STEP MacAdam LEDs



L70B50 50.000



Operating temperature:  
-30C° ~ 50C°



Wide 2000K-6500K white color range



Protection types IP 65



Dimmable



Lumen output:  
46 – 1847 lm



Stabilized current design



CR180+, CR190+



Customization for  
your project



Production line focused  
only for LED strips



Made in Europe



Thermally conductive  
adhesive tape



5-year warranty



# At a glance

## Side wrapping or top bending?


The LED strip sleeves are designed for decorative, ambient and indirect lighting applications.

What makes this group of products particularly attractive is their perfect blend of top value, professional quality and a minimalist design. The virtually unlimited length of sleeves and individual segment junctions invisible to the user means that these products are an excellent decorative solutions for large rooms, hallways, etc.


The sleeves are securely sealed from dust, water and offer a wide selection of wiring options. They are also resistant to ambient temperature changes and can be paired with a wide range of top quality Holectron 3-step MacAdam LED modules, 2200K-6500K CRI80+ or CRI90+.

## Opal

### Side bending / Sizes

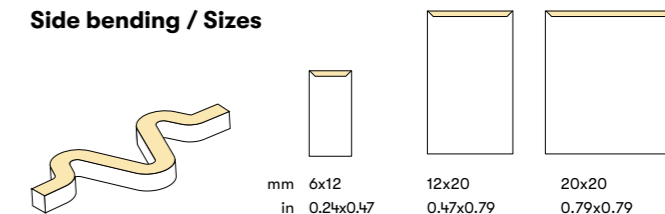


### Top bending / Sizes

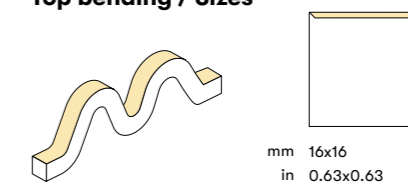

## Clear top

### Top bending / Sizes

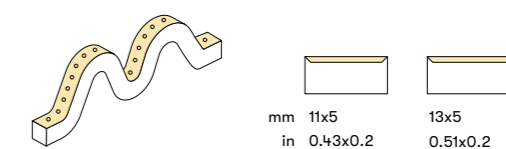

# Python 02

## Opal. Side bend

### Technical data

TYPE	CRI	SPECTRUM	LUMENS	WATTS
White	CRI80+	22K 27K 30K 35K 40K 50K 65K	57 - 527lm	1W 2W 4W 9W 14W
	CRI90+	22K 27K 30K 35K 40K 50K 65K	46 - 511 lm	1W 2W 4W 9W 14W


### Lighting options




Beam angle: 110°

### Specifications

#### Dimensions




#### Bend radius




#### Mounting

Aluminum profile




#### Modules types

##### INDIVIDUAL module



Wire from single side

#### Wire ends



Bare ends

With connector



Opal  
Side bend

# Python 03

## Opal. Side bend

### Technical data

TYPE	CRI	SPECTRUM	LUMENS	WATTS
<b>White</b>	CRI80+	22K 25K 27K 30K 35K 40K 50K 65K	61 - 569 lm	1W 2W 4W 9W 14W
	CRI90+	22K 25K 27K 30K 35K 40K 50K 65K	50 - 552 lm	1W 2W 4W 9W 14W
<b>Tunable White</b>		27K - 65K or any on demand	323 lm	9W
<b>RGB</b>	RGB	RGB	162 lm	14W
<b>RGBW</b> slightly visible dots	CRI80+	27K 30K 35K 40K 50K 65K	230 - 241 lm	14W
	CRI90+	27K 30K 35K 40K 50K 65K	214 - 223 lm	14W


### Lighting options




Beam angle: 110°

### Specifications

#### Dimensions




#### Bend radius



#### Mounting


Aluminum profile



#### Module types


##### INDIVIDUAL module

wire from single side

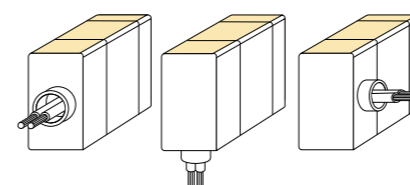

Wire end    Wire bottom    Wire side

#### Wire ends

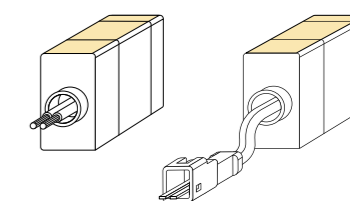

Bare ends    With connector



Opal  
Side bend


# Python 04

## Opal. Side bend

### Technical data


TYPE	CRI	SPECTRUM	LUMENS	WATTS
<b>White</b>	CRI80+	22K 25K 27K 30K 35K 40K 50K 65K	93 - 864 lm	1W 2W 4W - 9W - 14W
	CRI90+	22K 25K 27K 30K 35K 40K 50K 65K	75 - 838 lm	1W 2W 4W - 9W - 14W
<b>Tunable White</b>		27K - 65K or any on demand	491 lm	9W
<b>RGB</b>	RGB	RGB	130 - 197 lm	7W 11W
<b>RGBW</b>	CRI80+	27K 30K 35K 40K 50K - 65K	349 - 360 lm	14W
	CRI90+	27K 30K 35K 40K 50K - 65K	325 - 339 lm	14W

### Lighting options




### Specifications

#### Dimensions




#### Bend radius



#### Mounting


Aluminum profile

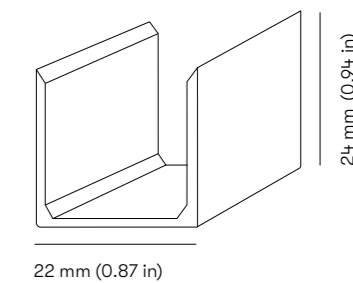

#### Module types


##### INDIVIDUAL module

wire from single side

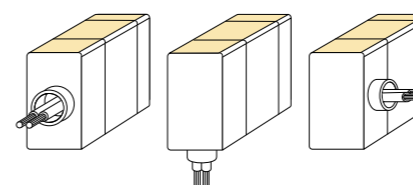

Wire end    Wire bottom    Wire side

#### Wire ends

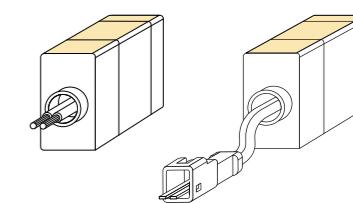

Bare ends    With connector



Opal  
Side bend

# Cobra 07

## Opal. Top bend

### Technical data

TYPE	CRI	SPECTRUM	LUMENS	WATTS
<b>White</b>	CRI80+	22K 25K 27K 30K 35K 40K 50K 65K	57 - 527 lm	1W 2W 4W 9W 14W
	CRI90+	22K 25K 27K 30K 35K 40K 50K 65K	46 - 511 lm	1W 2W 4W 9W 14W
<b>Tunable White</b>		27K - 65K or any on demand	302 lm	9W
<b>RGB</b>	RGB	RGB	150 lm	14W


### Lighting options



Beam angle: 110°


### Specifications

#### Dimensions



16 mm (0.63 in)


#### Bend radius



15 cm (5.90 in)

#### Mounting

Aluminum profile




19 mm (0.74 in)

20 mm (0.87 in)

#### Module types

##### INDIVIDUAL module

wire from single side

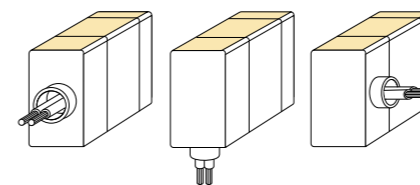


Wire end

Wire bottom

Wire side

#### Wire ends



Bare ends

With connector



Opal  
Top bend

# Viper

## Clear. Top bend

### Technical data

TYPE	CRI	SPECTRUM	LUMENS	WATTS
<b>White</b>	CRI80+	22K 25K 27K 30K 35K 40K 50K 65K	127 - 1847 lm	1W 2W 4W - 9W - 14W
	CRI90+	22K 25K 27K 30K 35K 40K 50K 65K	100 - 1765 lm	1W 2W 4W - 9W - 14W
<b>Tunable White</b>		27K - 65K or any on demand	1102 lm	9W
<b>RGB</b>	RGB	RGB	284 - 432 lm	- - - 7W - 11W
<b>RGBW</b>	CRI80+	27K 30K 35K 40K 50K 65K	783 - 820 lm	14W
	CRI90+	27K 30K 35K 40K 50K 65K	756 - 730 lm	14W

### Lighting options




Beam angle: 100°

### Specifications

#### Dimensions


##### Viper-08

For white




##### Viper-09

For Tunable white, RGB, RGBW




#### Bend radius




#### Mounting

##### Viper-08



30 mm (1.18 in)

##### Viper-09




32 mm (1.26 in)

#### Module types


##### INDIVIDUAL module

wire from single side



Wire end

#### Wire ends

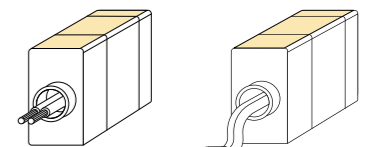

Bare ends

With connector



Clear  
Top bend





**Get more info about us**  
[www.holelectron.com](http://www.holelectron.com)

**Location**

Salininku str. 84, 02223 Vilnius  
Lithuania  
T +370 612 42446  
E [info@holelectron.com](mailto:info@holelectron.com)



**About Holecron**

Holecron company, located in Vilnius, Lithuania, owns two factories where flexible LED strips, various light sources and luminaires for indoor and outdoor applications are manufactured. The modern manufacturing facility includes R&D department, SMT assembling lines, metal processing, encapsulation stations, photometric laboratory and testing area.

At Holecron, we aim to be flexible on everything – except quality. In each of our products we use only highest quality materials from reliable suppliers and almost all of our products comes with 5-year warranty.

© 2024 Holecron Company. All rights reserved.