

HOLECTRON

Sleeves IP65



3 STEP MacAdam LEDs



L70B50 50.000



Operating temperature:
-30C° ~ 50C°



Wide 2200K-6500K white color range



Protection types IP 65



Dimmable



Lumen output:
46 – 1847 lm



Stabilized current design



CRI80+, CRI90+



Customization for
your project



Production line focused
only for LED strips



Made in Europe



Thermaly conductive
adhesive tape



5-year warranty



At a glance

Side wrapping or top bending?

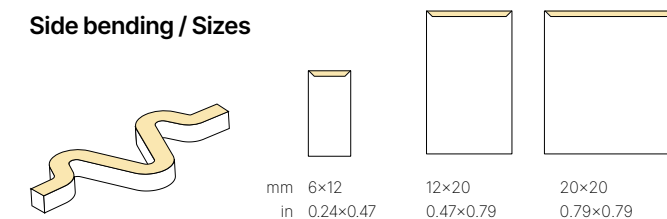
The LED strip sleeves are designed for decorative, ambient and indirect lighting applications.

What makes this group of products particularly attractive is their perfect blend of top value, professional quality and a minimalist design. The virtually unlimited length of sleeves and individual segment junctions invisible to the user means that these products are an excellent decorative solutions for large rooms, hallways, etc.


The sleeves are securely sealed from dust, water and offer a wide selection of wiring options. They are also resistant to ambient temperature changes and can be paired with a wide range of top quality Holecron 3-step MacAdam LED modules, 2200K-6500K CRI80+ or CRI90+.

Opal

Side bending / Sizes





Top bending / Sizes

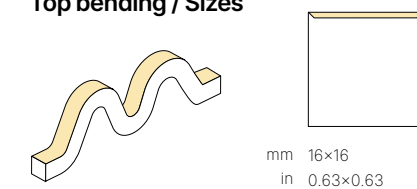

Clear top

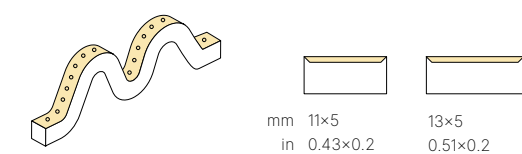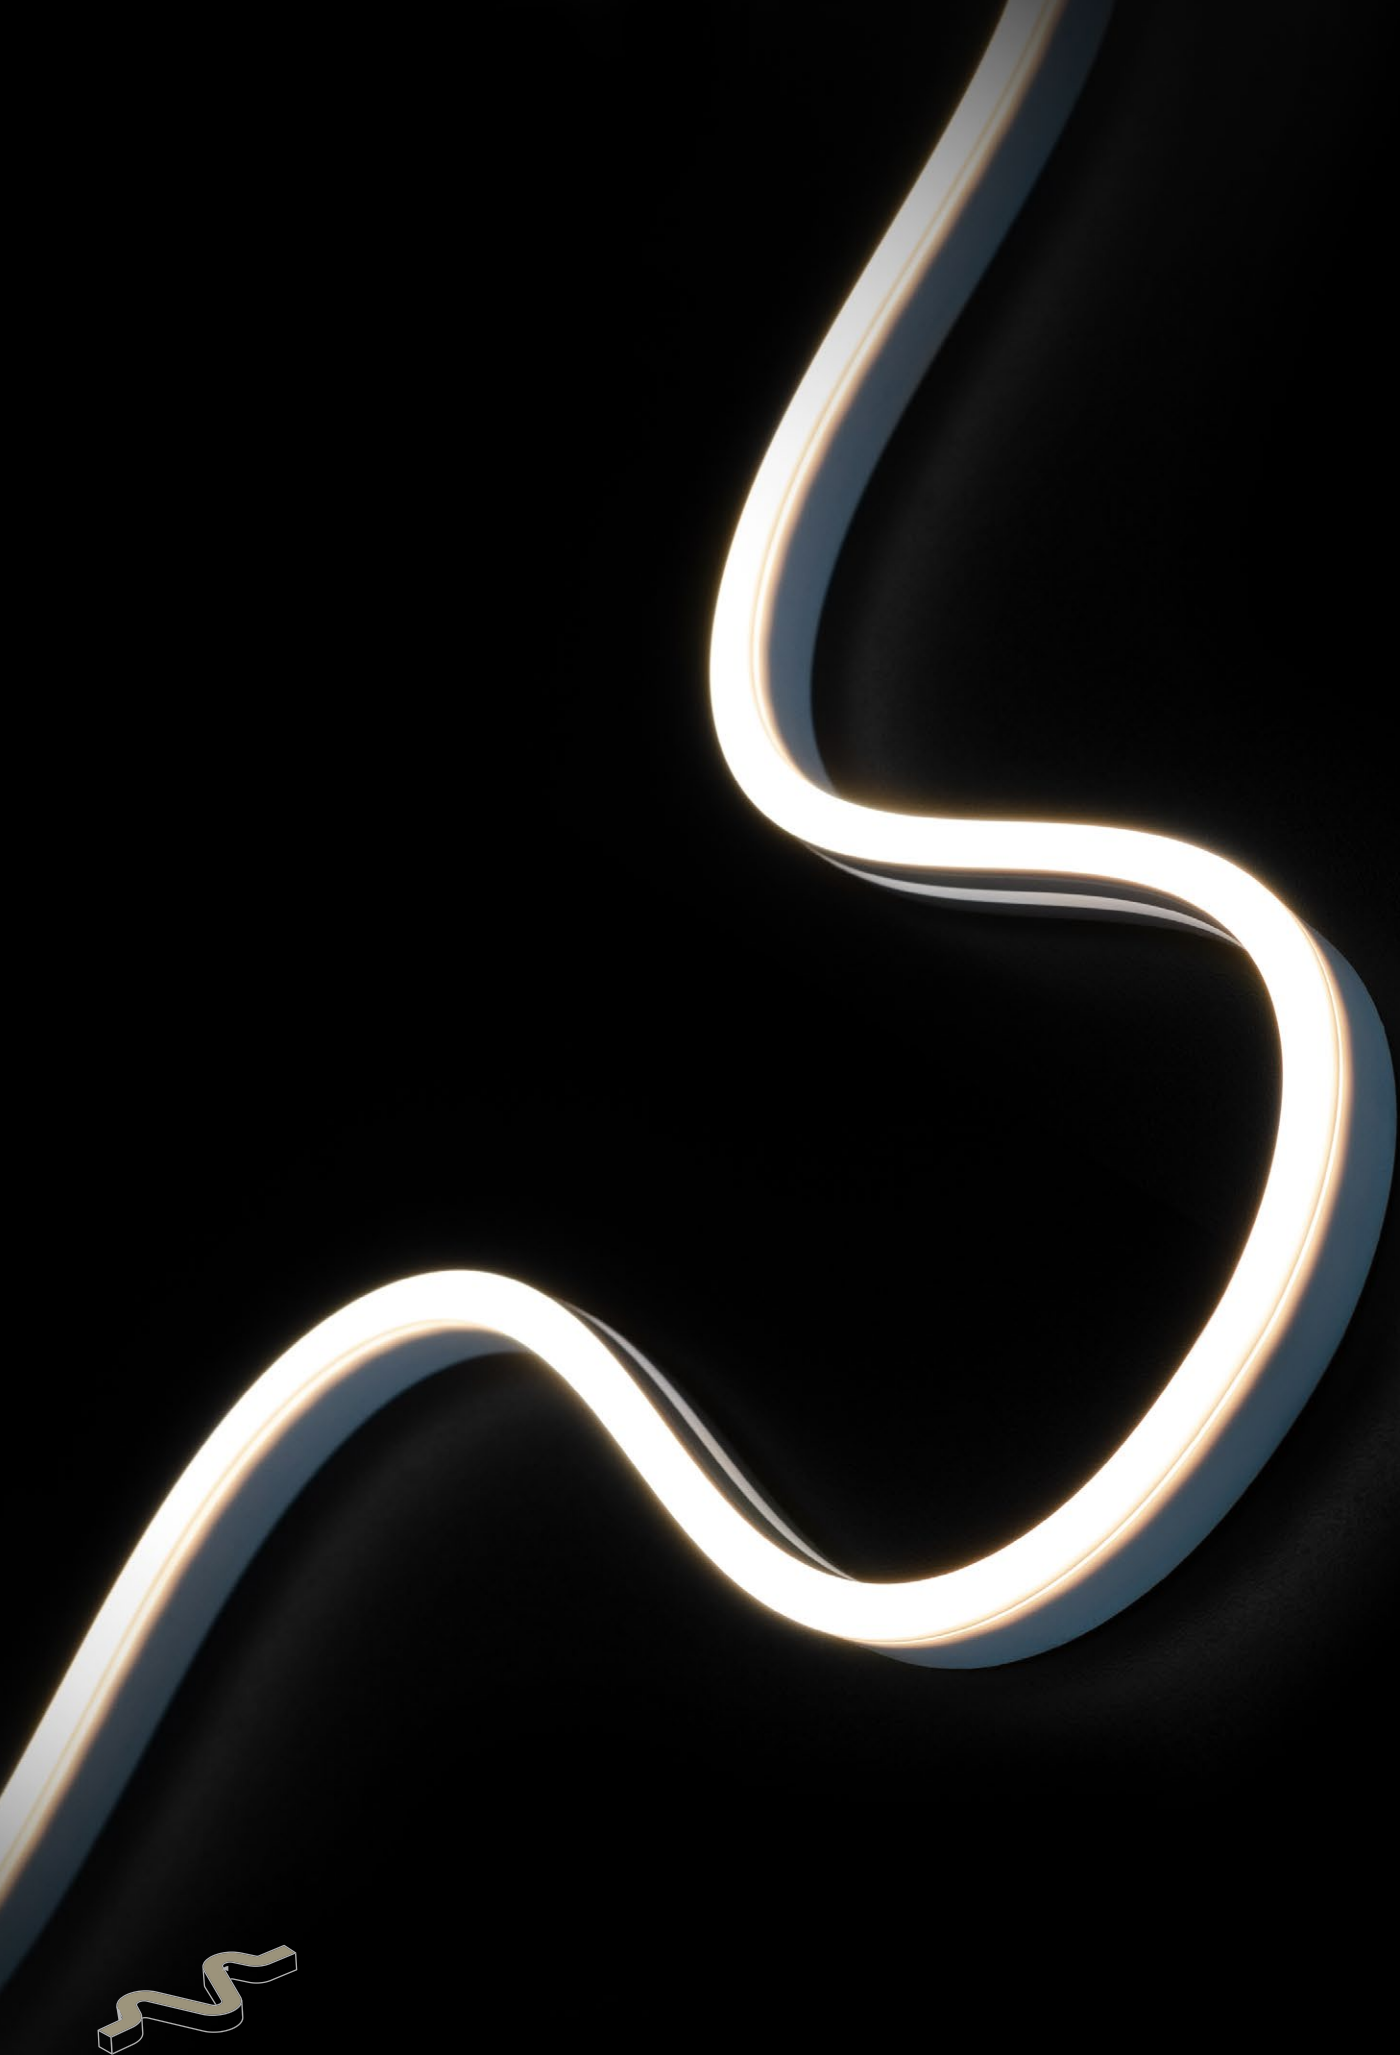Top bending / Sizes





Opal
Side bend

Python 02

Opal. Side bend

Technical data






TYPE	CRI	SPECTRUM	LUMENS	WATTS
White	CRI80+	22K 27K 30K 35K 40K 50K 65K	57 - 527lm	1W 2W 4W 9W 14W
	CRI90+	22K 27K 30K 35K 40K 50K 65K	46 - 511lm	1W 2W 4W 9W 14W


Lighting options



Beam angle: 110°

Specifications

Dimensions 	Bend radius 	Mounting Aluminum profile 
Modules types INDIVIDUAL module  Wire from single side	Wire ends  Bare ends With connector	

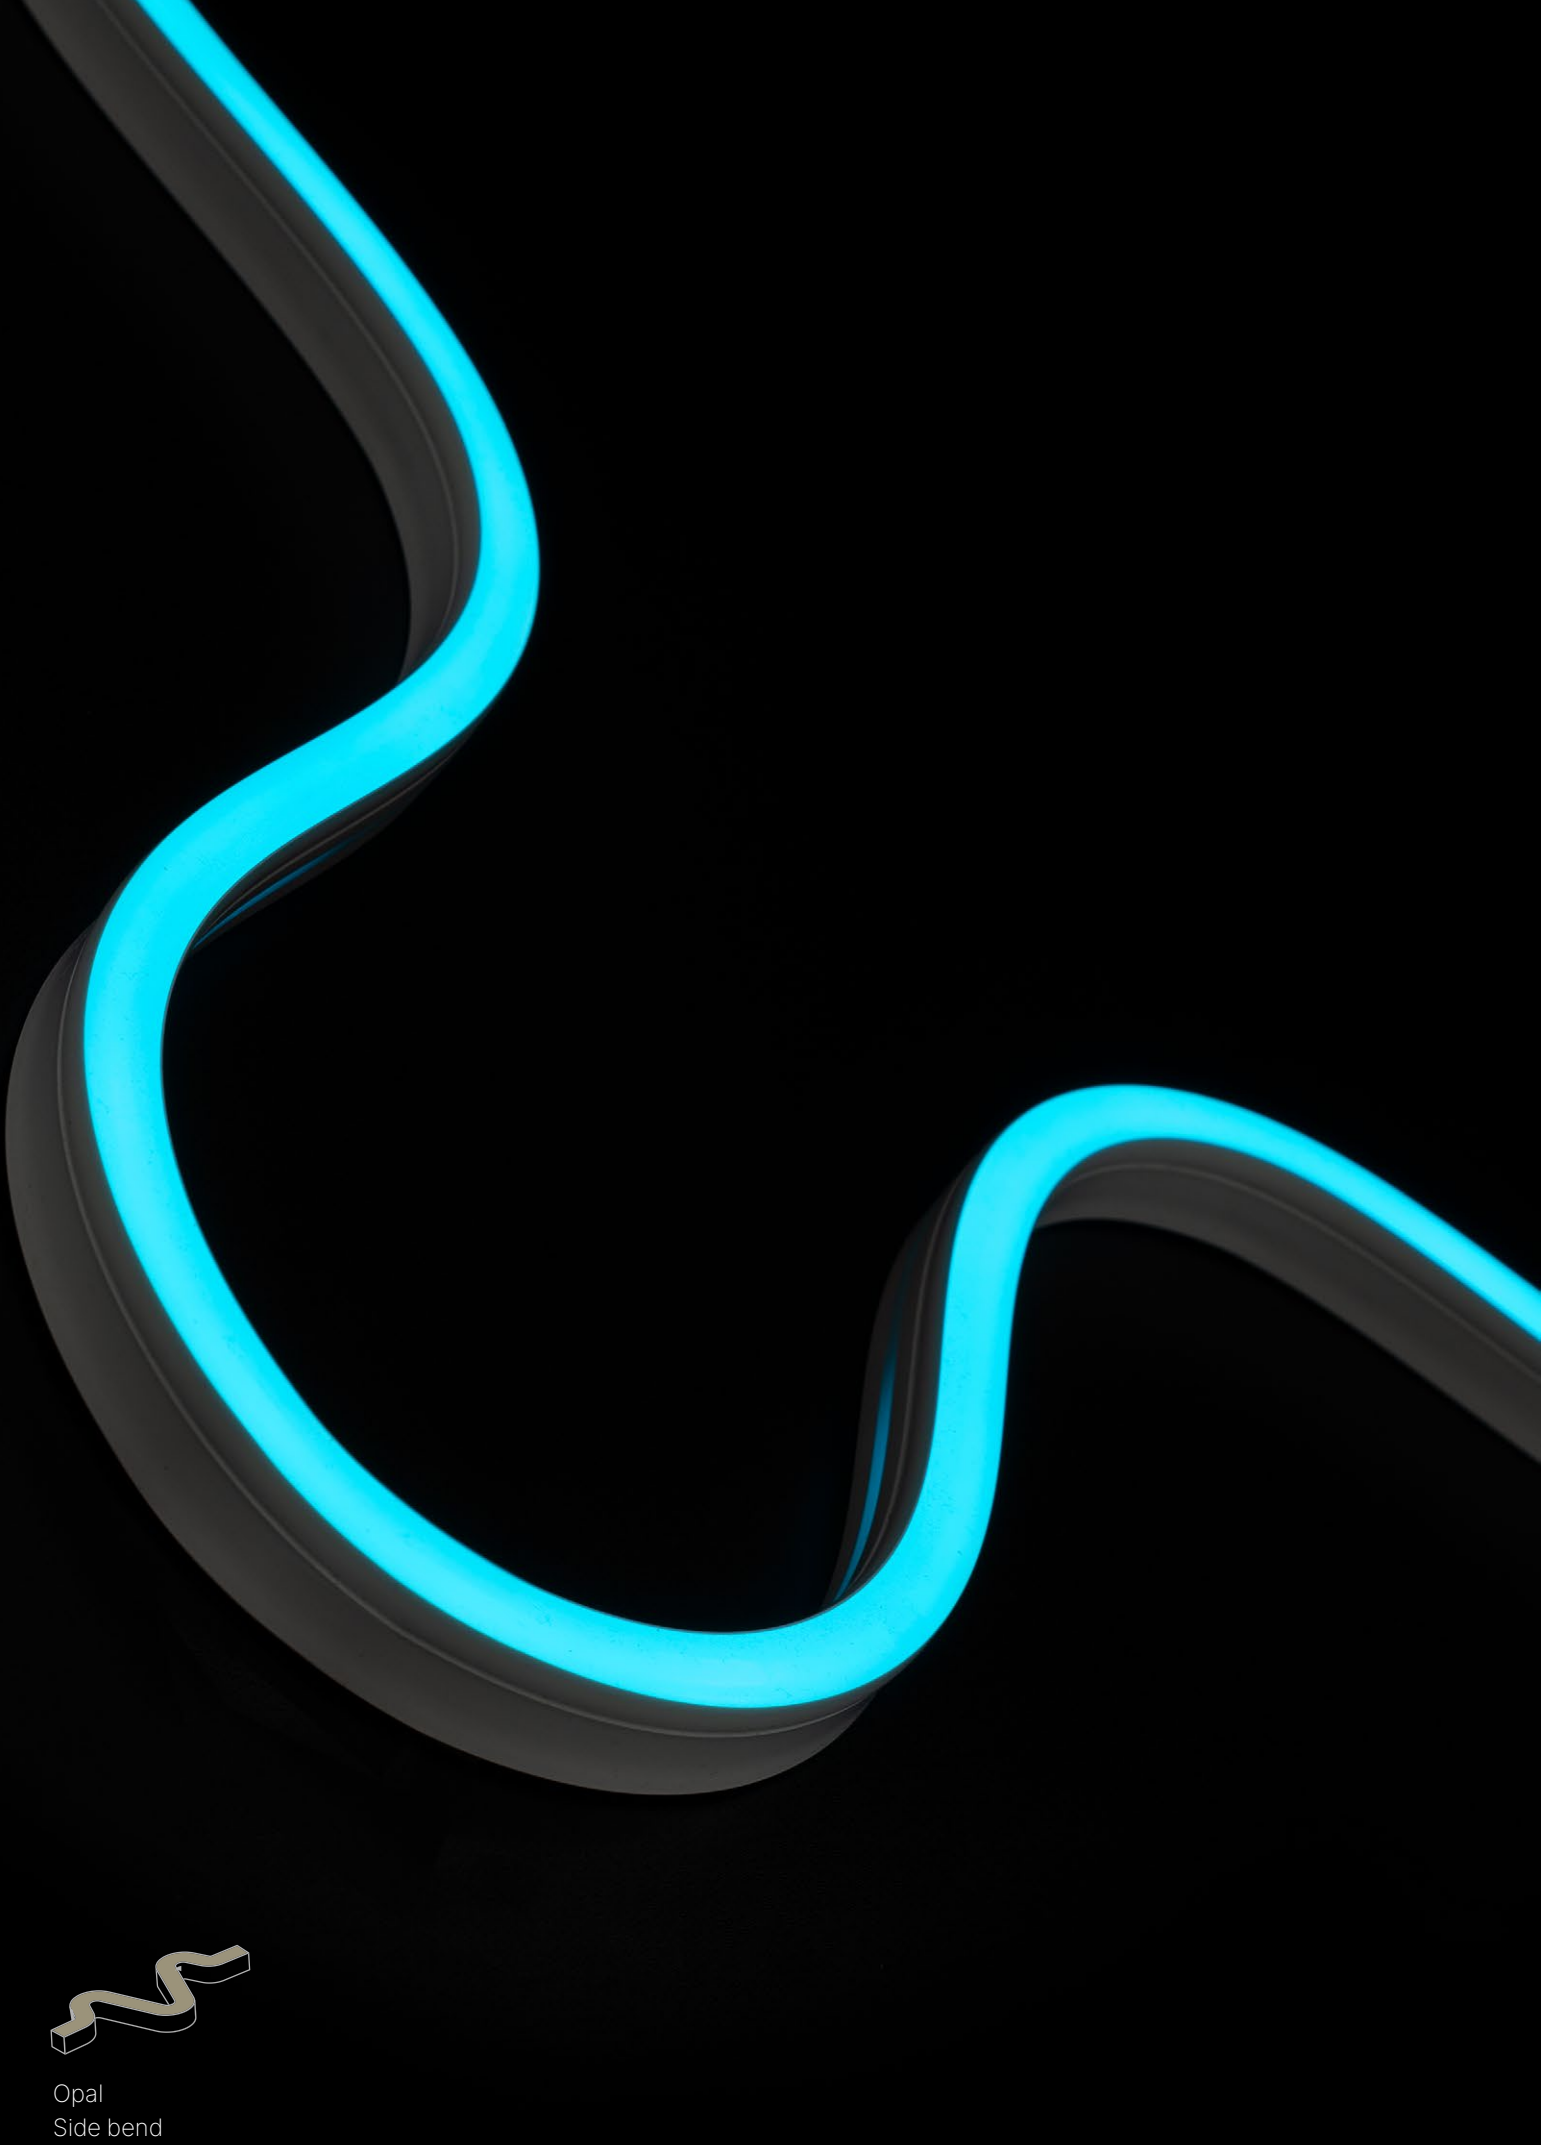

Opal
Side bend

Python 03

Opal. Side bend






Technical data										
TYPE	CRI	SPECTRUM					LUMENS		WATTS	
White	CRI80+	22K	27K	30K	35K	40K	50K	65K	61 - 569 lm	1W 2W 4W 9W 14W
	CRI90+	22K	27K	30K	35K	40K	50K	65K	50 - 552 lm	1W 2W 4W 9W 14W
Tunable White		27K - 65K or any on demand					323 lm		9W	
RGB	RGB	RGB					162 lm		14W	
RGBW slightly visible dots	CRI80+	27K	30K	35K	40K	50K	65K	230 - 241 lm	14W	
	CRI90+	27K	30K	35K	40K	50K	65K	214 - 223 lm	14W	


Lighting options



Beam angle: 110°

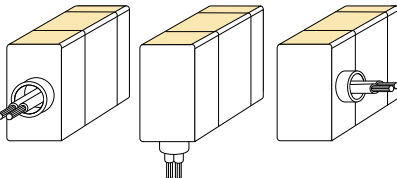Specifications

Dimensions  12 mm (0.47 in) 20 mm (0.79 in)	Bend radius  R 15 cm (5.90 in)	Mounting Aluminum profile  20 mm (0.79 in) 15 mm (0.6 in)
Module types INDIVIDUAL module wire from single side  Wire end Wire bottom Wire side		Wire ends  Bare ends With connector

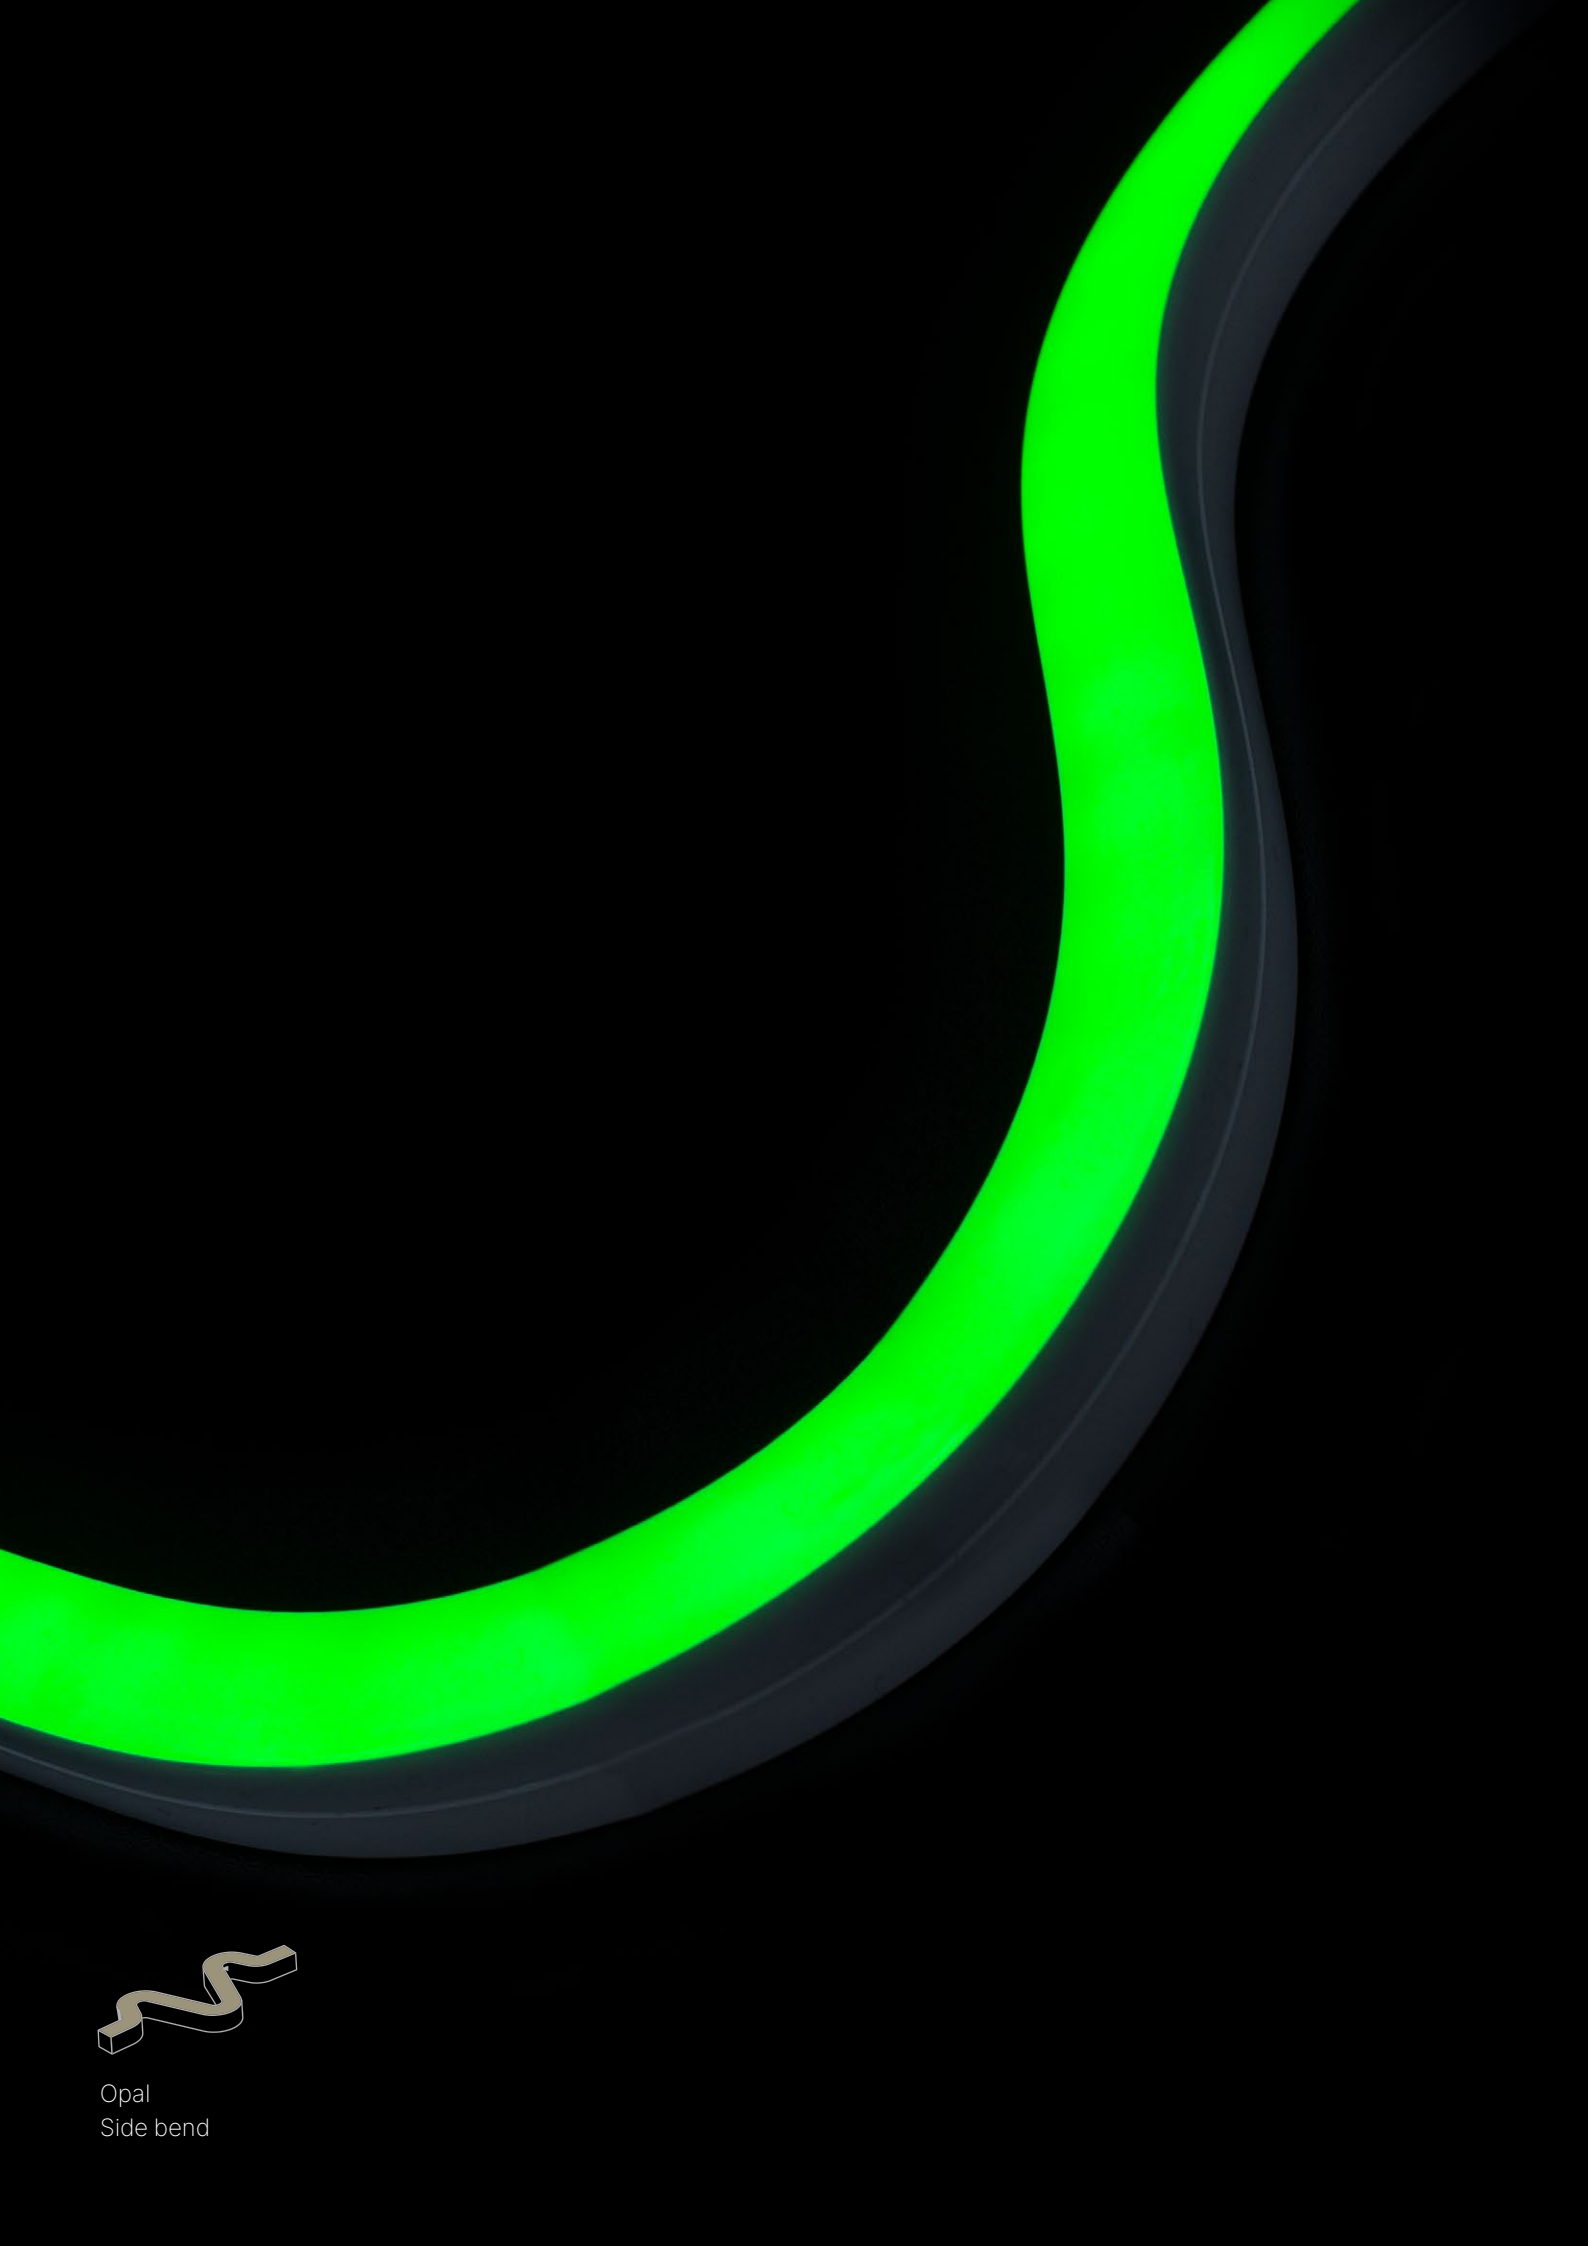

Opal
Side bend

Python 04

Opal. Side bend

Technical data






TYPE	CRI	SPECTRUM	LUMENS	WATTS
White	CRI80+	22K 27K 30K 35K 40K 50K 65K	93 - 864 lm	1W 2W 4W - 9W - 14W
	CRI90+	22K 27K 30K 35K 40K 50K 65K	75 - 838 lm	1W 2W 4W - 9W - 14W
Tunable White		27K - 65K or any on demand	491 lm	9W
RGB	RGB	RGB	130 - 197 lm	7W 11W
RGBW	CRI80+	27K 30K 35K 40K 50K 65K	349 - 360 lm	14W
	CRI90+	27K 30K 35K 40K 50K 65K	325 - 339 lm	14W


Lighting options



Beam angle: 110°

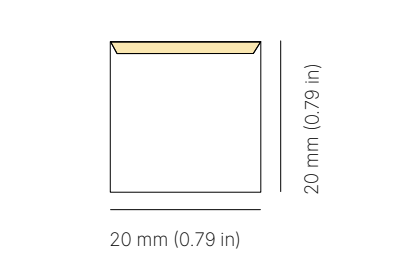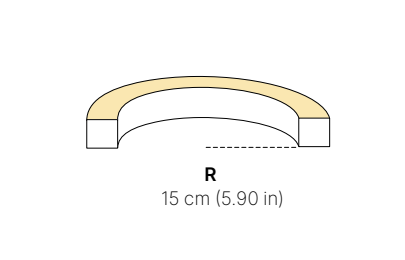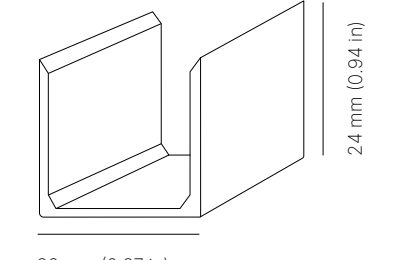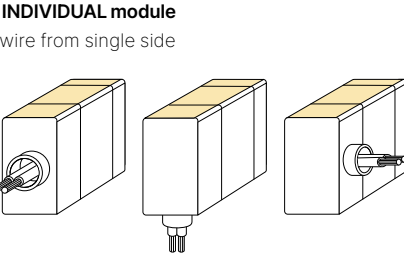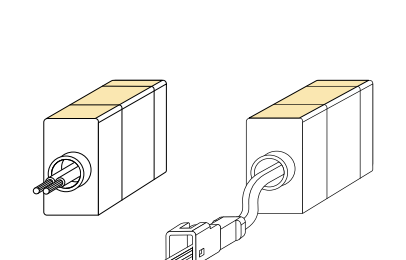Specifications

Dimensions  20 mm (0.79 in) 20 mm (0.79 in)	Bend radius  R 15 cm (5.90 in)	Mounting Aluminum profile  24 mm (0.94 in) 22 mm (0.87 in)
Module types INDIVIDUAL module wire from single side  Wire end Wire bottom Wire side	Wire ends  Bare ends With connector	

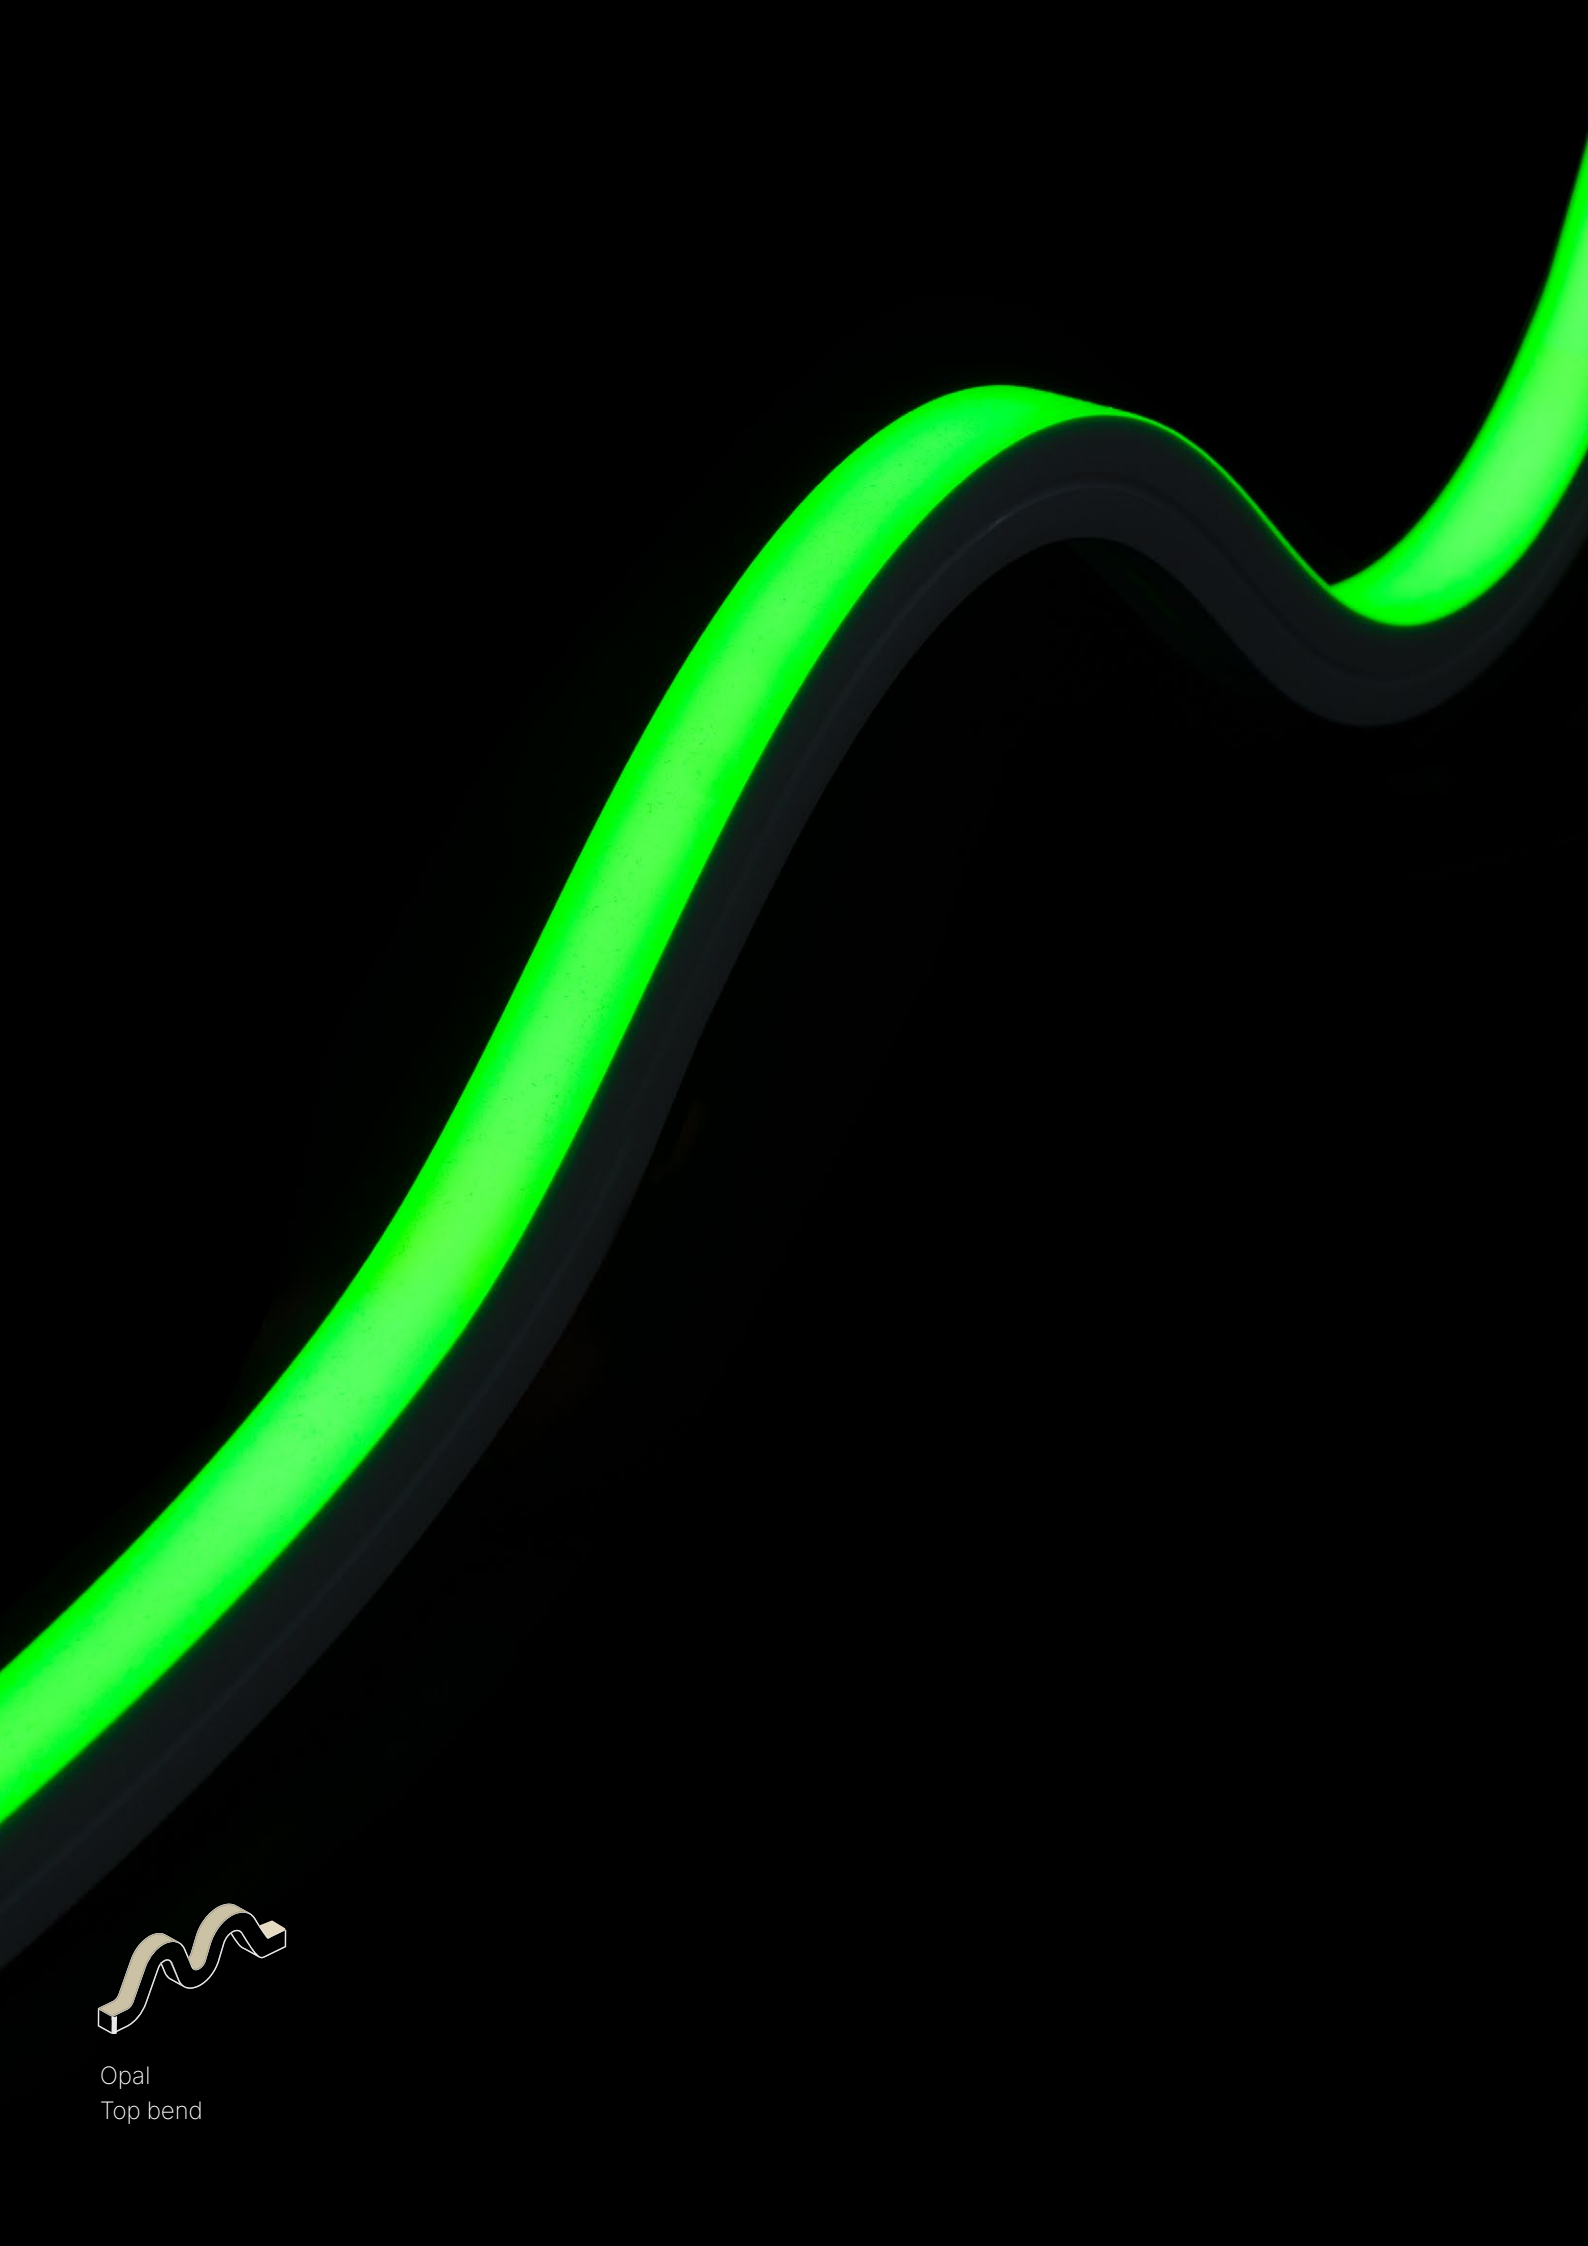

Opal
Top bend

Cobra 07

Opal. Top bend

Technical data






TYPE	CRI	SPECTRUM	LUMENS	WATTS				
White	CRI80+	22K 25K 27K 30K 35K 40K 50K 65K	57 - 527 lm	1W	2W	4W	9W	14W
	CRI90+	22K 25K 27K 30K 35K 40K 50K 65K	46 - 511 lm	1W	2W	4W	9W	14W
Tunable White		27K - 65K or any on demand	302 lm				9W	
RGB	RGB	RGB	150 lm					14W

Lighting options



Beam angle: 110°

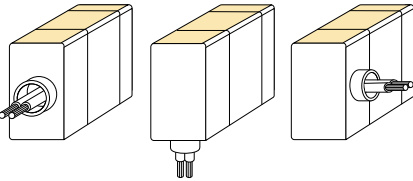Specifications

Dimensions 	Bend radius 	Mounting Aluminum profile 
Module types INDIVIDUAL module wire from single side  Wire end Wire bottom Wire side	Wire ends  Bare ends With connector	



Clear
Top bend

Viper

Clear. Top bend

Technical data








TYPE	CRI	SPECTRUM	LUMENS	WATTS					
White	CRI80+	22K 25K 27K 30K 35K 40K 50K 65K	127 - 1847 lm	1W	2W	4W	-	9W	- 14W
	CRI90+	22K 25K 27K 30K 35K 40K 50K 65K	100 - 1765 lm	1W	2W	4W	-	9W	- 14W
Tunable White		27K - 65K or any on demand	1102 lm					9W	
RGB	RGB	RGB	284 - 432 lm	-	-	-	7W	-	11W
RGBW	CRI80+	27K 30K 35K 40K 50K 65K	783 - 820 lm						14W
	CRI90+	27K 30K 35K 40K 50K 65K	756 - 730 lm						14W

Lighting options



Beam angle: 100°

Specifications

Dimensions Viper-08 For white  11 mm (0.43 in) Viper-09 For Tunable white, RGB, RGBW  13 mm (0.51 in)	Bend radius  R 10 cm (3.94 in)	Mounting Viper-08  30 mm (1.18 in) Viper-09  32 mm (1.26 in)
Module types INDIVIDUAL module wire from single side  Wire end	Wire ends  Bare ends With connector	



Get more info about us
www.holelectron.com

Location

Salininku str. 84, 02223 Vilnius
Lithuania
T +370 612 42446
E info@holelectron.com



About Holelectron

Holelectron company, located in Vilnius, Lithuania, owns two factories where flexible LED strips, various light sources and luminaires for indoor and outdoor applications are manufactured. The modern manufacturing facility includes R&D department, SMT assembling lines, metal processing, encapsulation stations, photometric laboratory and testing area.
At Holelectron, we aim to be flexible on everything – except quality. In each of our products we use only highest quality materials from reliable suppliers and almost all of our products comes with 5-year warranty.

© 2026 Holelectron Company. All rights reserved.