


RGB+W LED STRIPS 48 LEDS/M

RGBW-48-19/L3-825

Product code: RGBW-48-19/L3-825
Article No.: A4EDFACXX



PHOTOMETRICS

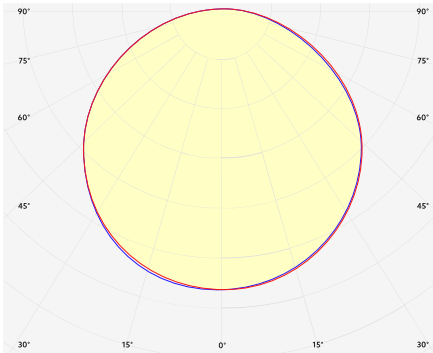

LEDs/M	RGBW 48 LEDs/m 3-Step MacAdam
SPECTRUM	RGB + White (2500K CRI 80+) 3-Step MacAdam
LUMINOUS FLUX	Total output: 948 Lm/m 289 Lm/ft White LED only: 474 Lm/m 144 Lm/ft RGB LED only: 474 Lm/m 144 Lm/ft
EFFICACY	49 Lm/W
LIFETIME	L70B50 50.000 h
DIMMING	Dimmable
ELECTRICAL	Power: 19.2 W/m 5.85 W/ft 24 VDC
TEMPERATURE	Tc max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)
DIMENSIONS	Width: 11.5 mm Height: 2 mm (0.08")
PHOTOMETRIC	120° beam angle
PACKING	10 m, 50 m or customized length per reel
OTHER	Cutting step: 125 mm (4.92") Max run: 4 m (13.1')

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.