





RGB48/NX G5 011W

RGB LED strips

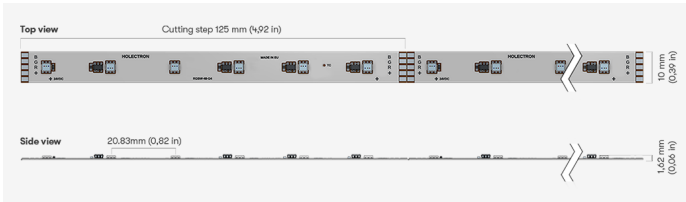

LIGHT TYPE	RGB
LEDs/M	48 LEDs/m
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	120° beam angle
LUMINOUS FLUX	Total: 480 Lm/m (146 Lm/ft) Red: 104 Lm/m (32 Lm/ft) Green: 307 Lm/m (94 Lm/ft) Blue: 69 Lm/m (21 Lm/ft)
EFFICACY	42 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	11.52 W/m 3.51 W/ft

CUTTING STEP	125 mm (4.92")
MAX RUN	6.5 m (21')
PACKING	10 m, 50 m or customized length per reel
DIMENSIONS	Width: 10 mm Height: 1.58 mm (0.06")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.