





# AQUA

## RGBW-48-9/N4-840

RGB+W

Article No.: B14EBKAGXX

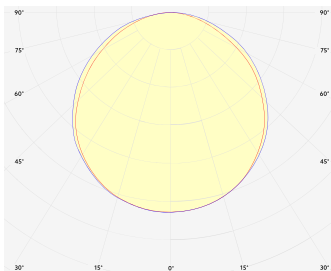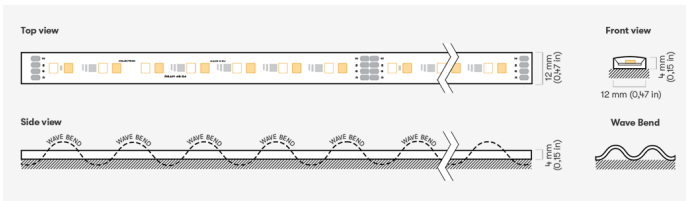

|                   |   |
|-------------------|---|
| CCT               | 4000K   |
| CRI               | CRI 80+   |
| COLOR CONSISTENCY | 3-Step MacAdam  |
| LIGHT TYPE        | RGBW  |
| LEDs/M            | 48 LEDs/m   |
| LUMINOUS FLUX     | Total: 501 Lm/m (153 Lm/ft)<br>White LED only: 307 Lm/m (93 Lm/ft)<br>RGB LED only: 316 Lm/m (96 Lm/ft) |
| EFFICACY          | 52 Lm/W   |
| LIFETIME          | L90B10 60.000 h   |

**CONTROL** Dimmable

**VOLTAGE** 24 VDC  
**WATTAGE** 9.6 W/m | 2.9 W/ft

**CUTTING STEP** 125 mm (4.92")  
**MAX RUN** 8 m (26')  
**OTHER DETAILS** IP67 protection

**TEMPERATURE** Tc max <75°C ( 167°F)  
**OPERATING TEMP.** -25°C...+50°C (-13°F...122°F)

**DIMENSIONS** Width: 12 mm (0.47")  
 Height: 4 mm (0.16")

**MOUNTING PROFILE** Polycarbonate  
 UV and Salt water resistant



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.