





AQUA

TW-56-9/N4-820/825

Tunable White

Article No.: B12ABIAAAC

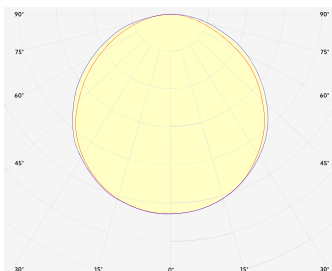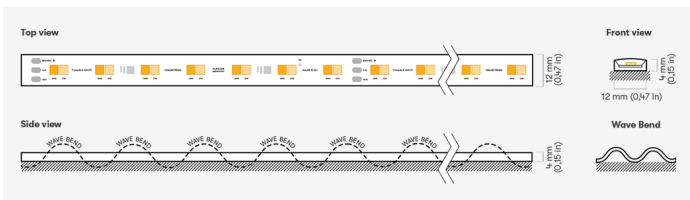

CCT	Warm: 2000K Cold: 2500K
CRI	Warm: 80+ Cold: 80+
COLOR CONSISTENCY	3-Step MacAdam
LIGHT TYPE	Tunable white
LEDs/M	56 LEDs/m
LUMINOUS FLUX	887 Lm/m (270 Lm/ft)
EFFICACY	92 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL Dimmable

VOLTAGE 24 VDC
 WATTAGE 9.6 W/m | 2.93 W/ft

CUTTING STEP 125 mm (4.92")
 MAX RUN 10 m (33')
 OTHER DETAILS IP67 protection

TEMPERATURE Tc max <75°C (167°F)
 OPERATING TEMP. -25°C...+50°C (-13°F...122°F)

DIMENSIONS Width: 12 mm (0.47")
 Height: 4 mm (0.16")

MOUNTING PROFILE Polycarbonate
 UV and Salt water resistant



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.