





# AQUA

AquaG2 IE RWE.CLR / FL56/Nx.24V G5 02W 825 L1000

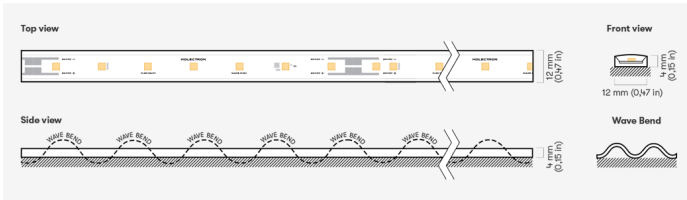

<b>TYPE</b>	White
<b>CCT</b>	2500K
<b>CRI</b>	CRI 80+
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>LEDs/M</b>	56 LEDs/m
<b>LUMINOUS FLUX</b>	Luminaire: 233 Lm/m Light Source: 290 Lm/W
<b>EFFICACY</b>	Luminaire: 97 Lm/W
<b>LIFETIME</b>	Light Source: 121 Lm/W L90B10 60.000 h
<b>CONTROL</b>	Dimmable
<b>VOLTAGE</b>	24V DC
<b>WATTAGE</b>	2.4 W/m   0.73 W/ft
<b>CUTTING STEP</b>	125 mm (4.92")
<b>MAX RUN</b>	18.5 m (61')
<b>OTHER DETAILS</b>	IP67 protection
<b>TEMPERATURE</b>	Tc max <75°C ( 167°F )
<b>OPERATING TEMP.</b>	-25°C...+50°C ( -13°F...122°F )
<b>DIMENSIONS</b>	Width: 12 mm (0.47") Height: 4 mm (0.16")
<b>MOUNTING PROFILE</b>	Polycarbonate UV and Salt water resistant



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.