

ULA L IP67 RGBW LIGHT

UlaL.IP67 A1112 IEC AGY EOP / RGBW48/Nx G4 019W 822 L1000


Luminaire segment




COLORS

 Grey housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

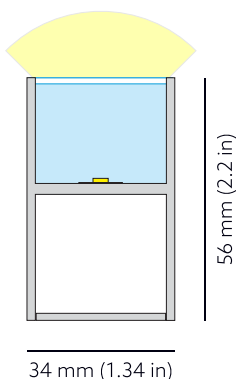

SPECTRUM (WHITE LED)	2200K CRI 80+ 3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Per segment: 610 lm Light source (per segment): 1230 lm Per meter/feet: 610 lm/m 186 lm/ft RGB only: 238 lm/m
EFFICACY	Luminaire: 32 lm/W Light source: 64 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, polyurethane
ELECTRICAL	Segment power: 19.2 W Power per meter/feet: 19.2 W/m Voltage: 24 VDC
TEMPERATURE	Tc max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)
OTHER DETAILS	IP67 protection Dimmable Install in well-ventilated areas only
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 1003 mm 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.