

ULA L IP67 RGBW LIGHT

UlaL.IP67 A1112 IEC AGY EOP / RGBW48/Nx G4 014W 822 L750


Luminaire segment




COLORS



PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

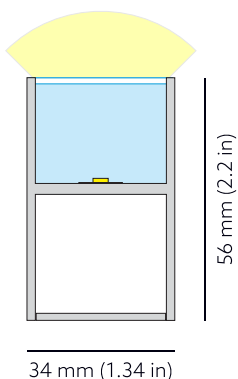

SPECTRUM (WHITE LED)	2200K
	CRI 80+
	3-Step MacAdam

COVER	Opal
--------------	------

LUMINOUS FLUX*	Per segment: 296 lm
	Light source (per segment): 596 lm
	Per meter/feet: 394 lm/m 120 lm/ft
	RGB only: 223 lm/m

EFFICACY	Luminaire: 27 lm/W
	Light source: 55 lm/W

LIFETIME	L90B10 60.000h
-----------------	----------------

HOUSING	Aluminum, polyurethane
----------------	------------------------

ELECTRICAL	Segment power: 10.8 W
	Power per meter/feet: 14.4 W/m
	Voltage: 24 VDC

TEMPERATURE	Tc max <75°C (167°F)
	Operating: -25°C...+50°C (-13°F...122°F)

OTHER DETAILS	IP67 protection
	Dimmable
	Install in well-ventilated areas only

DIMENSIONS	Width: 34 mm 1.34"
	Height: 56 mm 2.20"
	Length: 753 mm 2.5'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.